

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

1. Product Features

- Hot-pluggable 800G OSFP-RHS Active Loopback
- 3nm CMOS process DSP
- Compliant with OSFP MSA, close top
- VCC voltage ranges from 2.97V to 3.63V
- Operating case temperature 0°C to +85 °C
- Multi-color LED on the front
- The module power distributed to the 3 burners
- Customized CMIS Rev 5.2

2. Product Applications

- Switch aging and testing
- 8x100G, 8x50G ,8x25G active loopback

3. Product Description

3.1 PRODUCT NAME AND SERIES NUMBER(S)

800G Active Loopback OSFP-RHS Transceiver


JPC P/N	Bit Rate	Function	Connector	Display
P69**XKKSX00-1	800G	Active Loopback	NA	Multi-color LED

Notes: ** Indicates the customer code.

3.2 Dimension, Materials, Plating and Marking

The module mechanical design comply with Type 2 in the section 3 of the OSFP Octal Small Form Factor Pluggable Module, Rev 5.0 with power consumption at 35W.

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

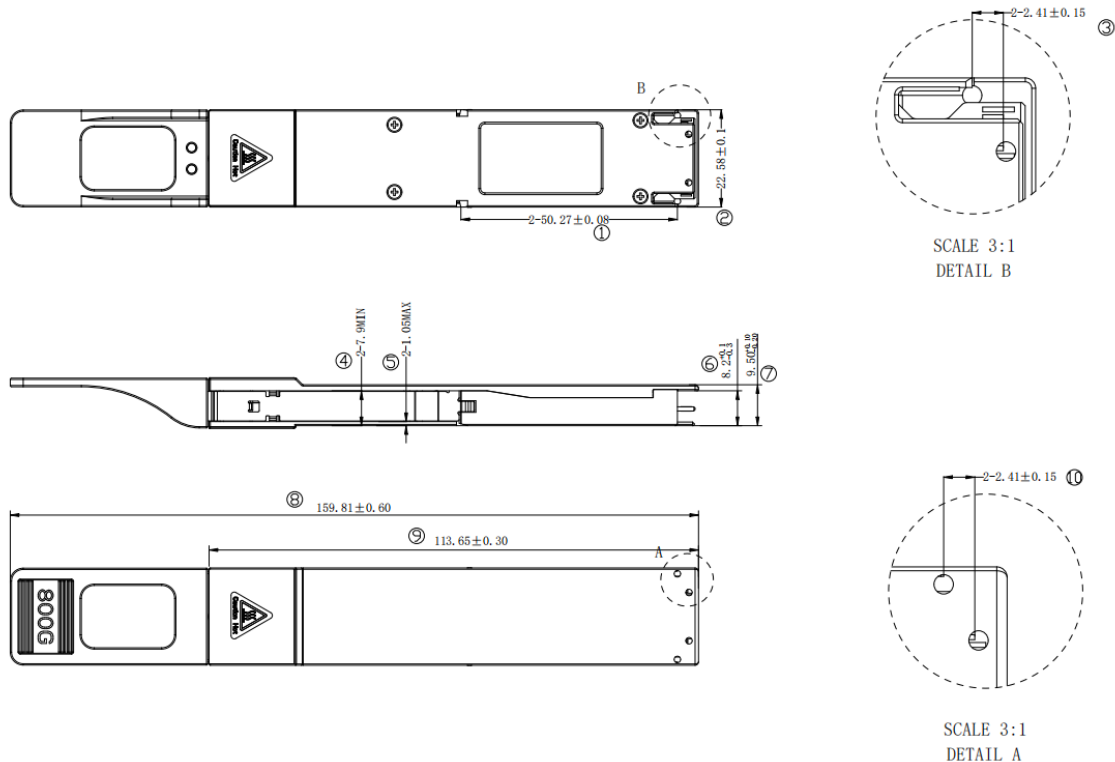

Unit is millimeter. All dimensions are ± 0.1 mm unless otherwise specified.

3.3 Module Critical Features

The follow are the critical feature requirements for the module and should be consistent with the OSFP MSA.

4. Product Specification

4.1 Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Supply Voltage	Vcc	-0.3	-	3.6	V	
Storage Temperature	T _s	0	-	+85	°C	
Operating Humidity	RH	5	-	+85	%	
Control Input Voltage	VI	-0.3	-	VCC+0.3	V	

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

4.2 Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Operating Case Temperature	T _C	0	-	85	°C	
Power Supply Voltage	V _{CC}	2.97	3.3	3.63	V	
Power Dissipation	P _{diss}	-	-	35	W	
Supply Current	I _{CC}	1.5	-	10.6	A	1

Note:

- 1.5A supply current excluding Burners power consumption.

4.3 Digital Diagnostic Specifications

Parameter	Symbol	Unit	Min	Max	Notes
Temperature monitor absolute error	DMI_Temp	degC	-3	3	Temperature range 0 to 85°C
Supply voltage monitor absolute error	DMI_VCC	V	-10%	10%	Voltage range 2.97 to 3.63V

5. Programmable power consumption/burner

After power-up, the default power consumption is less than 5W to boot up the DSP, MCU and associated control logic/circuitry. Afterward, host can set the module to consume higher power by programming the 3 burners in 3 regions in section.

6. Status LED

A multi-color LED viewed from the front of the module in order to signify high/low power modes, module fully insert, and interrupts:

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

6.1 LED interface arrangement

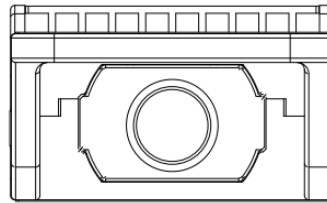


Figure 2 LED interface arrangement


6.2 Inducation of Status Lights

LED	System state	Inducation
Module status	Module is not powered on	OFF
	Module is operating in high power mode	Green (solid)
	Module is operating in low power mode	Orange (solid)
	Module in high pwer mode with voltage or temperature alarm	Green blinking
	Module in low power mode with voltage or temperature alarm	Orange blinking
	Module is in high temperature cut-off fault	Red blinking

7. Applications Note:

7.1 Pin Definitions

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

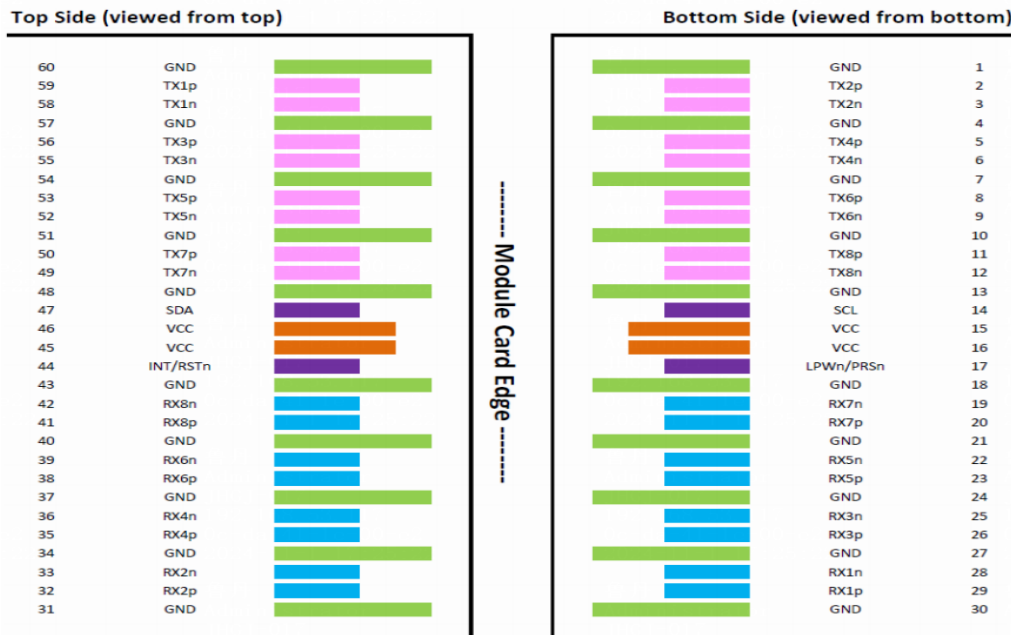

7.2 Pin Function Definitions for OSFP

Pin#	Symbol	Description	Logic	Direction	Plug Sequence
1	GND		Ground		1
2	TX2p	Transmitter Data Non-Inverted	CML-I	Input from Host	3
3	TX2n	Transmitter Data Inverted	CML-I	Input from Host	3
4	GND		Ground		1
5	TX4p	Transmitter Data Non-Inverted	CML-I	Input from Host	3
6	TX4n	Transmitter Data Inverted	CML-I	Input from Host	3
7	GND		Ground		1
8	TX6p	Transmitter Data Non-Inverted	CML-I	Input from Host	3
9	TX6n	Transmitter Data Inverted	CML-I	Input from Host	3
10	GND		Ground		1
11	TX8p	Transmitter Data Non-Inverted	CML-I	Input from Host	3
12	TX8n	Transmitter Data Inverted	CML-I	Input from Host	3
13	GND		Ground		1
14	SCL	2-wire Serial interface clock	LVCMOS-I/O	Bi-directional	3
15	VCC	+3.3V Power		Power from Host	2

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

16	VCC	+3.3V Power		Power from Host	2
17	LPWn/PRSn	Low-Power Mode / Module Present	Multi-Level	Bi-directional	3
18	GND		Ground		1
19	RX7n	Receiver Data Inverted	CML-O	Output to Host	3
20	RX7p	Receiver Data Non-Inverted	CML-O	Output to Host	3
21	GND		Ground		1
22	RX5n	Receiver Data Inverted	CML-O	Output to Host	3
23	RX5p	Receiver Data Non-Inverted	CML-O	Output to Host	3
24	GND		Ground		1
25	RX3n	Receiver Data Inverted	CML-O	Output to Host	3
26	RX3p	Receiver Data Non-Inverted	CML-O	Output to Host	3
27	GND		Ground		1
28	RX1n	Receiver Data Inverted	CML-O	Output to Host	3
29	RX1p	Receiver Data Non-Inverted	CML-O	Output to Host	3
30	GND		Ground		1
31	GND		Ground		1
32	RX2p	Receiver Data Inverted	CML-O	Output to Host	3
33	RX2n	Receiver Data Non-Inverted	CML-O	Output to Host	3
34	GND		Ground		1
35	RX4p	Receiver Data Inverted	CML-O	Output to Host	3
36	RX4n	Receiver Data Non-Inverted	CML-O	Output to Host	3
37	GND		Ground		1
38	RX6p	Receiver Data Inverted	CML-O	Output to Host	3
39	RX6n	Receiver Data Non-Inverted	CML-O	Output to Host	3
40	GND		Ground		1
41	RX8p	Receiver Data Inverted	CML-O	Output to Host	3
42	RX8n	Receiver Data Non-Inverted	CML-O	Output to Host	3
43	GND		Ground		1
44	INT/RSTn	Module Interrupt / Module Reset	Multi-Level	Bi-directional	3
45	VCC	+3.3V Power		Power from Host	2
46	VCC	+3.3V Power		Power from Host	2

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

47	SDA	2-wire Serial interface data	LVC MOS-I/O	Bi-directional	3
48	GND		Ground		1
49	TX7n	Transmitter Data Non-Inverted	CML-I	Input from Host	3
50	TX7p	Transmitter Data Inverted	CML-I	Input from Host	3
51	GND		Ground		1
52	TX5n	Transmitter Data Non-Inverted	CML-I	Input from Host	3
53	TX5p	Transmitter Data Inverted	CML-I	Input from Host	3
54	GND		Ground		1
55	TX3n	Transmitter Data Non-Inverted	CML-I	Input from Host	3
56	TX3p	Transmitter Data Inverted	CML-I	Input from Host	3
57	GND		Ground		1
58	TX1n	Transmitter Data Non-Inverted	CML-I	Input from Host	3
59	TX1p	Transmitter Data Inverted	CML-I	Input from Host	3
60	GND		Ground		1

8. Memory Map

8.1 00 LowPage Note

Page	Address	Size	Name	Description
N/A	0	1	Identifier	19h: Identifier Type of OSFP
	1	1	CmisRevision	53h: CMIS5.2 support
	2	1	I2C speed	04h: Module supports up to 1 MHz
	3	1	BIT:7-4 Reserved	Reserved

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

				101b	ModuleFault
			BIT:0 InterruptDeasserted	Status of Interrupt output signal 1b: Interrupt not asserted (default) 0b: Interrupt asserted	
4	1	SumFlagBank0 BIT3: FlagsSummaryBank0Page2Ch BIT2: FlagsSummaryBank0Page14h BIT1: FlagsSummaryBank0Page12h BIT0: FlagsSummaryBank0Page11h		1b: at least one Flag is set on Bank 0, Page 2Ch 1b: at least one Flag is set on Bank 0, Page 14h 1b: at least one Flag is set on Bank 0, Page 12h 1b: at least one Flag is set on Bank 0, Page 11h	
8	1	BIT:6 CdbCmdCompleteFlag1 BIT:0 ModuleStateChangedFlag		Latched Flag to indicate completion of a CDB command for CDB instance 1. Latched Flag to indicate a Module State Change	
9	1	BIT:7 VccMonLowWarningFlag BIT:6 VccMonHighWarningFlag BIT:5 VccMonLowAlarmFlag BIT:4		Latched Flag for low/high supply voltage warning/alarm Latched Flag for low/high temperature	

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

			VccMonHighAlarmFlag BIT:3 TempMonLowWarningFlag BIT:2 TempMonHighWarningFlag BIT:1 TempMonLowAlarmFlag BIT:0 TempMonHighAlarmFlag	warning/alarm
12	2		TempMonValue 2	S16 Module Temperature Monitor (Current Value) internally measured temperature in 1/256 degree Celsius increments
14	2		TempMonValue 1	S16 Module Temperature Monitor (Current Value) internally measured temperature in 1/256 degree Celsius increments
16	2		VccMonVoltage	U16 Supply Voltage Monitor (Current Value) internally measured input supply voltage in 100 µV increments
26	1		BIT:7 BankBroadcastEnable BIT:6 LowPwrAllowRequestHW	0b: Bank broadcast for lane-banked pages disabled Enables evaluation of the LowPwrRequestHW hardware signal 0b: Module ignores the LowPwrRequestHW signal 1b: Module evaluates the LowPwrRequestHW signal (default) 0b: No request 1b: Request for the module to stay in, or to return into, Low Power mode Self-clearing trigger bit that causes the module

		BIT:4 LowPwrRequestSW BIT:3 SoftwareReset	to be reset when 1b is written to it. The effect of a SoftwareReset trigger is the same as asserting the Reset hardware signal for the appropriate hold time, followed by its de-assertion. 0b: No action 1b: Software reset (include all)
31	1	BIT:6 CdbCmdCompleteMask1 BIT:2 DataPathFirmwareErrorMask BIT:1 ModuleFirmwareErrorMask BIT:0 ModuleStateChangedMask	Mask bit for CdbCmdCompleteFlag1 Mask bit for DataPathFirmwareErrorFlag Mask bit for ModuleFirmwareErrorFlag Mask bit for ModuleStateChangedFlag
32	1	BIT:7 VccMonLowWarningMask BIT:6 VccMonHighWarningMask BIT:5 VccMonLowAlarmMask	Mask bit for VccMonLowWarningFlag Mask bit for VccMonHighWarningFlag Mask bit for VccMonLowAlarmFlag

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

			BIT:4 VccMonHighAlarmMask BIT:3 TempMonLowWarningMask BIT:2 TempMonHighWarningMask BIT:1 TempMonLowAlarmMask BIT:0 TempMonHighAlarmMask	Mask bit for VccMonHighAlarmFlag Mask bit for TempMonLowWarningFlag Mask bit for TempMonHighWarningFlag Mask bit for TempMonLowAlarmFlag Mask bit for TempMonHighAlarmFlag
37	1	CdbStatus1		Refer CMIS 5.2
39	1	ModuleActiveFirmwareMajorRevision		0x00 U8 Numeric representation of the module' s active firmware major revision
40	1	ModuleActiveFirmwareMinorRevision		0x01 U8 Numeric representation of the module' s active firmware major revision
85	1	Module Type Encodings		0x03 Passive and Linear Active Copper Cables
86	1	ApSelCode 1: Host Electrical Interface Code		0x51 800GAUI-8 S C2M
87	1	ApSelCode 1: Module Media Interface Code		0xBF Passive Loopback module
88	1	ApSelCode 1: Host/Media Lane Count		0x80 Host Lane Count 8,and Media Lane Count 0

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

89	1	ApSelCode 1: Host Lane Assignment Options	0x01 Start Channel 1 for use this APP
90	1	ApSelCode 2: Host Electrical Interface Code	0x4F 400GAUI-4-S C2M
91	1	ApSelCode 2: Module Media Interface Code	0xBF Passive Loopback module
92	1	ApSelCode 2: Host/Media Lane Count	0x40 Host Lane Count 4, and Media Lane Count 0
93	1	ApSelCode 2: Host Lane Assignment Options	0x11 Start Channel 1 and 5 for use this APP
94	1	ApSelCode 3: Host Electrical Interface Code	0x52 800GAUI-8 L C2M
95	1	ApSelCode 3: Module Media Interface Code	0xBF Passive Loopback module
96	1	ApSelCode 3: Host/Media Lane Count	0x80 Host Lane Count 8, and Media Lane Count 0
97	1	ApSelCode 3: Host Lane Assignment Options	0x01 Start Channel 1 for use this APP
98	1	ApSelCode 4: Host Electrical Interface Code	0x50 400GAUI-4-S C2M
99	1	ApSelCode 4: Module Media Interface Code	0xBF Passive Loopback module
100	1	ApSelCode 4: Host/Media Lane Count	0x40 Host Lane Count 4, and Media Lane Count 0
101	1	ApSelCode 4: Host Lane Assignment Options	0x11 Start Channel 1, 5 for use this APP
102	1	ApSelCode 5: Host Electrical Interface Code	0x4B 100GAUI-1-S
103	1	ApSelCode 5: Module Media Interface Code	0xBF Passive Loopback module

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

104	1	ApSelCode 5: Host/Media Lane Count	0x10 Host Lane Count 1,and Media Lane Count 0
105	1	ApSelCode 5: Host Lane Assignment Options	0xFF Start Channel 1,2,3,4,5,6,7,8 for use this APP
106	1	ApSelCode 6: Host Electrical Interface Code	0x4C 400GBASE-CR4
107	1	ApSelCode 6: Module Media Interface Code	0xBF Passive Loopback module
108	1	ApSelCode 6: Host/Media Lane Count	0x10 Host Lane Count 1,and Media Lane Count 0
109	1	ApSelCode 6: Host Lane Assignment Options	0xFF Start Channel 1,2,3,4,5,6,7,8 for use this APP
110	1	ApSelCode 7: Host Electrical Interface Code	0x11 400GAUI-8 C2M
111	1	ApSelCode 7: Module Media Interface Code	0xBF Passive Loopback module
112	1	ApSelCode 7: Host/Media Lane Count	0x80 Host Lane Count 8,and Media Lane Count 0
113	1	ApSelCode 7: Host Lane Assignment Options	0x01 Start Channel 1 for use this APP
114	1	ApSelCode 8: Host Electrical Interface Code	0x0E 200GAUI-8 C2M
115	1	ApSelCode 8: Module Media Interface Code	0xBF Passive Loopback module
116	1	ApSelCode 8: Host/Media Lane Count	0x80 Host Lane Count 8,and Media Lane Count 0
117	1	ApSelCode 8: Host Lane Assignment Options	0x01 Start Channel 1 for use this APP
118-121	4	PasswordChangeEntryArea	U32: new password value

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

	122-125	4	PasswordEntryArea	U32: password value
	126	1	BankSelect	Refer CMIS 5.2
	127	1	PageSelect	Refer CMIS 5.2

8.2 00 HighPage Note

Page	Address	Size	Name	Description
00h	128	1	Identifier	19h: Identifier Type of OSFP
	129-144	16	Vendor name	Vendor name (ASCII)
	145-147	3	VendorOUI	Vendor IEEE company ID
	148-163	16	VendorPN	Part number provided by vendor (ASCII)
	164-165	2	VendorRev	Revision level for part number provided by vendor (ASCII)
	166-181	16	VendorSN	Vendor Serial Number (ASCII)
	182-189	8	DateCode	Manufacturing Date Code (ASCII) Refer CMIS 5.2
	190-199	10	CLEICode	Common Language Equipment Identification Code (ASCII)
	200	1	ModulePowerCtrl BIT:6 Region 3 burner Enable BIT:5 Region 2 burner Enable BIT:0 Region 5 burner Enable	 BIT0, BIT5, and BIT6 control three heating blocks, with 1 turning heating on and 0 turning it off.

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

201	1	MaxPower	0x54:MaxPower 21w(for adaptation switch)	
214	1	Region 3 power consumption	Set Value	Heater Level
215	1	Region 2 power consumption	0x10	0
218	1	Region 5 power consumption	0x18	0.72
			0x20	1.0
			0x28	1.5
			0x30	2.0
			0x38	2.5
			0x40	3.0
			0x48	3.5
			0x50	4.0
			0x58	4.5
			0x60	5.0
			0x68	5.5
			0x70	6.0
			0x78	6.5
			0x80	7.0
			0x88	7.2
			0x90	8.0
			0x98	8.5
			0xA0	9.0
222	1	page checksum	Refer CMIS 5.2	
223-255	33	Custom Info	Refer CMIS 5.2	

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

8.3 01 HighPage Note

Page	Address	Size	Name	Description
01h	128	1	ModuleInactiveFirmwareMajorRevision	0x00
	129	1	ModuleInactiveFirmwareMinorRevision	0x01
	130	1	ModuleHardwareMajorRevision	0x01
	131	1	ModuleHardwareMinorRevision	0x00
	142	1	BIT:6 VDMPagesSupported	1b : supported VDM page 20-2F
			BIT:5 DiagnosticPagesSupported	1b : DiagnosticPages13h-14h supported
			BIT:2 Page03hSupported	1b : User Page 03h supported
			BIT1-0: BanksSupported	00b: Bank 0 supported (8 lanes)
	144	1	Maximum duration of the DPDeinit / DPInit state	87h: DPDeinit : 5 s <= T state < 10 s DPInit : 1 s <= T state < 5 s
	145	1	BIT:7 CoolingImplemented	0b:Uncooled transmitter device
			BIT:6-5	

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

			TxInputClockingCapabilities BIT:3 ePPSSupported BIT:3 TimingPage15hSupported BIT:2 Aux3MonObservable BIT:1 Aux2MonObservable BIT:0 Aux1MonObservable	11b: Lanes may be asynchronous in frequency 0b: ePPS signal processing not supported 0b: Timing characteristics (Page 15h) not supported 0b: Aux 3 monitor monitors Laser Temperature 0b: Aux 2 monitor monitors Laser Temperature 0b: Aux 1 monitor is custom
146	1	ModuleTempMax		5Ah: Maximum allowed module temperature 90°C
147	1	ModuleTempMin		FBh: Maximum allowed module temperature - 5°C
150	1	OperatingVoltageMin		94h: Minimum supported module operating voltage 2.9V
151	1	BIT:6-5 RxOutputEqType		00b: Peak-to-peak (p-p) amplitude stays constant, or not implemented, or no information
153	1	BIT:7-4 RxOutputLevel 3-0 Supported		0Fh: Amplitude Code 3-0 supported

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

			BIT:3-0 TxInputEqMax	00h: TxInput Eq is Auto changed, No manual Eq Max value
154	1		BIT:7-4 RxOutputEqPostCursorMax BIT:3-0 RxOutputEqPreCursorMax	0X07:Post-Cursor Equalization 7 dB 0X07:Pre-Cursor Equalization 3.5 dB
155	1		BIT:0 InputPolarityFlipTxSupported	0b: InputPolarityFlipTx control not supported
156	1		BIT:7 BankBroadcastSupported BIT:2 AutoSquelchDisableRxSupported BIT:1 OutputDisableRxSupported BIT0: OutputPolarityFlipRxSupported	0b: The BankBroadcastEnable control is not supported 0b: Host cannot disable automatic squelching of Rx outputs using the AutoSquelchDisableRx register. 1b: Host can disable Rx outputs using the OutputDisableRx register 0b: PolarityFlipRx not supported
157	1		BIT:1 LOSFlagTxSupported	1b: Tx Loss of Signal Flags supported

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

		BIT:0 FailureFlagTxSupported	1b: Tx Fault Flags supported
159	1	BIT:5 CustomMonSupported BIT:4 Aux3MonSupported BIT:3 Aux2MonSupported BIT:2 Aux1MonSupported BIT:1 VccMonSupported BIT:0 TempMonSupported	1b: Custom monitor supported 0b: Aux 3 monitor not supported 0b: Aux 2 monitor not supported 0b: Aux 1 monitor not supported 1b: Internal 3.3 V monitor supported 1b: Temperature monitor supported
161	1	BIT:6-5 TxInputEqRecallBuffersSupported BIT:4 TxInputEqFreezeSupported BIT:3 TxInputAdaptiveEqSupported BIT:2	00b: Tx Input Eq Store/Recall not supported 0b: Tx Input Eq Freeze not supported 1b: Adaptive Tx Input Eq supported

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

		TxInputEqHostControlSupported BIT:1 TxCDRBypassControlSupported BIT:0 TxCDRSupported	0b: host-control of Tx Input Eq target not supported 0b: If a Tx CDR is supported, it cannot be bypassed 1b: Tx CDR supported supported
162	1	BIT:7 VersatileControlSetSupported BIT:6 UnidirReconfigSupported BIT:5 StagedSet1Supported BIT:4-3 RxOutputEqControlSupported BIT:2 RxOutputAmplitudeControlSupported BIT:1 RxCDRBypassControlSupported BIT:0 RxCDRSupported	0b: CMIS-VCS [6] functionality is not supported 0b: ApplyImmediateTx/Rx on Page 10h and DPConfigTx/Rx on Page 19h are not supported 1b: Staged Control Set 1 supported on Page 10h 11b: both Pre- and Post-cursor supported 1b: Rx Output Amplitude control supported 0b: Rx CDR Bypass control not supported (if a CDR is supported, it cannot be bypassed) 1b: Rx CDR supported

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

163	1	CDB Advertisement	0x67: Refer CMIS 5.2 for detail
164	1	CdbReadWriteLengthExtension	0xFF:Refer CMIS 5.2 for detail
165	1	CdbCommandTriggerMethod,and CdbExtMaxBusyTime	0x9F:Refer CMIS 5.2 for detail
166	1	CdbMaxBusySpecMethod , CdbMaxBusyTime	0x80:Refer CMIS 5.2 for detail
167	1	BIT:7-4: MaxDurationModulePwrDn BIT:3-0 MaxDurationModulePwrUp	0X06: 500 ms <= T state < 1 s 0X08: 5 s <= T state < 10 s
168	1	BIT:7-4: MaxDurationDPTxTurnOff BIT:3-0 MaxDurationDPTxTurnOn	0X05: 100 ms <= T state < 500 ms 0X07: 1 s <= T state < 5 s
223	1	ApSelCode 9: Host Electrical Interface Code	0x0A: 50GAUI-1 C2M
224	1	ApSelCode 9: Module Media Interface Code	0xBF: Passive Loopback module
225	1	ApSelCode 9: Host/Media Lane Count	0x10: Host Lane Count 1,and Media Lane Count 0
226	1	ApSelCode 9: Host Lane Assignment Options	0xFF: Start Channel 1,2,3,4,5,6,7,8 for use this APP
227	1	ApSelCode 10: Host Electrical Interface Code	0x05: CAUI-4 C2M(Annex83E)
228	1	ApSelCode 10: Module Media Interface Code	0xBF: Passive Loopback module
229	1	ApSelCode 10:	0x10: Host Lane Count 1,and Media Lane Count 0

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

			Host/Media Lane Count	
230	1	ApSelCode 10: Host Lane Assignment Options	0xFF: Start Channel 1,2,3,4,5,6,7,8for use this APP	
231	1	ApSelCode 11: Host Electrical Interface Code	0x41: CAUI-4 C2M(Annex83E)	
232	1	ApSelCode 11: Module Media Interface Code	0xBF: Passive Loopback module	
233	1	ApSelCode 11: Host/Media Lane Count	0x40: Host Lane Count 4,and Media Lane Count 0	
234	1	ApSelCode 11: Host Lane Assignment Options	0x11: Start Channel 1,5for use this APP	
235	1	ApSelCode 12: Host Electrical Interface Code	0xFF: FFh to mark as unused (empty Application Descriptor)	
255	1	Page Checksum	The checksum code shall be the low order 8 bits of the arithmetic sum of all byte values from byte 130 to byte 254, inclusive	

8.4 02 HighPage Note

Page	Address	Size	Name	Description
02h	128-129	2	TempMonHighAlarmThreshold	0x5A00: Temp High Alarm 90℃
	130-131	2	TempMonLowAlarmThreshold	0xF600: Temp Low Alarm -10℃
	132-133	2	TempMonHighWarningThreshold	0x5500: Temp High Warning 85℃
	134-135	2	TempMonLowWarningThreshold	0xFB00: Temp Low Warning -5℃
	136-137	2	VccMonHighAlarmThreshold	0x8DCC: Vcc High Alarm 3.63V
	138-139	2	VccMonLowAlarmThreshold	0x7404: Vcc Low Alarm 2.97V
	140-141	2	VccMonHighWarningThreshold	0x875A: Vcc High Warning 3.47V
	142-143	2	VccMonLowWarningThreshold	0x7A76: Vcc High Warning 3.14V

8.5 03 HighPage Note

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

Page	Address	Size	Name	Description
03h	128-255	128	User Data	Module user data stored in NV memory
	129	1	BIT:7-4 Green Led Status BIT:3-0 Red Led Status	Current LED Status 0000b: Off 0001b:On 00010:Blinking
	138	1	Heater Time Set(Minute)	Set heater time
	139	1	BIT:5 LpMod Control BIT1: LPWn logic status	Read 0b:No edge detected Read 1b:Either rising edge or falling edge crossing the 1.25V thrshold is detected. Write 0b: No effect Write1b: clear the Bit Read 1b: High Read 0b: Low
	140	1	BIT:1-0 INTL control	0xb:Normal Operation 10b:Force M_INT to logic 0 11b:Force M_INT to logic 1
	168	2	Supply Volatge Size on VccTx	
	170	2	Supply Volatge Size on VccRx	
	174	2	Supply Current Size on VccTx	
	176	2	Supply Current Size on VccRx	
	182	2	Dsp Version	(ASCII) RO

8.6 10 HighPage Note

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

Page	Address	Size	Name	Description
10h	128	1	Data Path initialization control	Refer CMIS5.2
	138	1	OutputDisableRx<i>	0b: Rx output enabled for lane <i> 1b: Rx output disabled for lane <i>
	143	1	SCS0::ApplyDPInitLane<i>	Refer CMIS5.2
	144	1	SCS0::ApplyImmediate<i>	Refer CMIS5.2
	145-152	8	SCS0::DPConfigLane1-8	Refer CMIS5.2
	162-165	4	SCS0::OutputEqPreCursorTargetRx<i>	Refer CMIS5.2
	166-169	4	SCS0::OutputEqPostCursorTargetRx<i>	Refer CMIS5.2
	170-173	4	SCS0::OutputAmplitudeTargetRx<i>	Refer CMIS5.2
	176	1	SCS0::ApplyImmediateTx<i>	Refer CMIS5.2
	177	1	SCS0::ApplyImmediateRx<i>	Refer CMIS5.2
	178	1	SCS1::ApplyDPInitLane<i>	Refer CMIS5.2
	179	1	SCS1::ApplyImmediate<i>	Refer CMIS5.2
	180-187	8	SCS1::DPConfigLane1 -8	Refer CMIS5.2
	197-200	4	SCS1::OutputEqPreCursorTargetRx<i>	Refer CMIS5.2
	201-204	4	SCS1::OutputEqPostCursorTargetRx<i>	Refer CMIS5.2
	205-208	4	SCS1::OutputAmplitudeTargetRx<i>	Refer CMIS5.2
	211	1	SCS1::ApplyImmediateTx<i>	Refer CMIS5.2
	212	2	SCS1::ApplyImmediateRx<i>	Refer CMIS5.2
	213	1	DPStateChangedMask<i>	Refer CMIS5.2
	215	1	LOSMaskTx<i>	Refer CMIS5.2
	216	1	CDRLOLMaskTx<i>	Refer CMIS5.2
	232	1	OutputStatusChangedMaskRx<i>	Refer CMIS5.2

8.7 11 HighPage Note

Page	Address	Size	Name	Description
11h	128-131	4	Data Path States	Refer CMIS5.2

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

132	1	OutputStatusRx<i>	Refer CMIS5.2
134	1	DPStateChangedFlag<i>	Refer CMIS5.2
136	1	LOSFlagTx<i>	Refer CMIS5.2
137	1	CDRLOLFlagTx<i>	Refer CMIS5.2
153	1	OutputStatusChangedFlagRx<i>	Refer CMIS5.2
202-205	4	ConfigStatusLane<i>	Refer CMIS5.2
206-213	8	ACS::DPConfigLane1-8	Refer CMIS5.2
223-226	4	ACS::OutputEqPreCursorTargetRx<i>	Refer CMIS5.2
227-230	4	ACS::OutputEqPostCursorTargetRx<i>	Refer CMIS5.2
231-234	4	ACS::OutputAmplitudeTargetRx<i>	Refer CMIS5.2

8.8 13 HighPage Note

Page	Address	Size	Name	Description
13h	128	1	Loopback capabilities	0X08: HostSideInputLoopback
	129	1	BIT:7-6 GatingSupport BIT:5 GatingResultsSupported BIT:4 PeriodicUpdatesSupported BIT:3	11b: Supported with time accuracy > 20 ms 1b: Supported 1b: periodic update during measurement 0b: Only two global gating timers are available for all lanes on all Banks, one for Host Side

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

		PerLaneGatingTimersSupported	Measurements and one for Media Side Measurements.
		BIT:2 AutoRestartGatingSupported	1b: AutoRestartGating control (13h:177.4) supported
130	1	BIT:6 HostSideFEC	1b: Supported (PRBS error information available)
		BIT:4 HostSideInputSNRMeasurement	1b: Supported
		BIT:1 BitsAndErrorsCountingSupported	1b: Supported
		BIT:0 BitErrorRatioResultsSupported	1b: Supported
131	1	BIT:2 PRBSGeneratorHostSidePostFEC	1b: Supported
		BIT:0 PRBSCheckerHostSidePostFEC	1b: Supported
132-133	2	HostSideGeneratorSupportsPattern<i>	0XFF0A Refer CMIS5.2
136-137	2	HostSideCheckerSupportsPattern<i>	0XFF1F

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

			Refer CMIS5.2
141	1	BIT:3 HostSideCheckerSupportsDataSwap BIT:2 HostSideCheckerSupportsDataInvert BIT:1 HostSideGeneratorSupportsDataSwap BIT:0 HostSideGeneratorSupportsDataInvert	0b: not supported 1b: supported 0b: not supported 0b: not supported
142	1	BIT:3 HostCheckerSupportsPerLaneEnable BIT:2 HostCheckerSupportsPerLanePattern BIT:1 HostGeneratorSupportsPerLaneEnable BIT:0 HostGeneratorSupportsPerLanePattern	1b: per lane enable supported 1b: per lane enable supported 1b: per lane enable supported

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

			1b: per lane enable supported
144	1	HostSideGeneratorEnableLanex	Refer CMIS5.2
148-151	4	HostSideGeneratorPatternSelectLanex	Refer CMIS5.2
160	1	HostSideCheckerEnableLanex	Refer CMIS5.2
161	1	HostSideCheckerDataInvertLanex	Refer CMIS5.2
164-167	1	HostSideCheckerPatternSelectLanex	Refer CMIS5.2
176	1	HostPRBSGeneratorClockSource	0b: All lanes use Internal Clock
177	1	BIT:7 StartStopsIsGlobal BIT:5 ResetErrorInformation BIT:4 AutoRestartGating BIT:3-1 MeasurementTime BIT:0 UpdatePeriodSelect	0b: A start/stop control change acts on current Bank Refer CMIS5.2 Refer CMIS5.2 Refer CMIS5.2
208	1	PatternCheckGatingCompleteMaskHostLane<i>	Refer CMIS5.2
212	1	PatternCheckerLOLMaskHostLane<i>	Refer CMIS5.2

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

8.9 14 HighPage Note

Page	Address	Size	Name	Description
14h	128	1	DiagnosticsSelector	Refer CMIS5.2 Supported by 01h,02h,03h,06h
	134	1	PatternCheckGatingCompleteFlagHostLane<i>	Refer CMIS5.2
	138	1	PatternCheckerLOLFlagHostLane<i>	Refer CMIS5.2
	192-255	64	Diagnostics Data	Refer CMIS5.2

8.10 20HighPage Note

Page	Address	Size	Name	Description
20h	128-143	16	VDMDDescriptor (Defaule Set SNR (dB) Host Input (Lane 1-8))	Refer CMIS5.2
	144-159	16	VDMDDescriptor (Defaule Set PAM4 Level Transition Parameter Host Input (Lane 1-8))	Refer CMIS5.2

8.11 24HighPage Note

Page	Address	Size	Name	Description
24h	128-143	16	eSNR Host Input (Host Lane 1-8)	RO
	144-159	16	PAM4 LTPM Input (Host Lane 1-8)	RO

8.12 2FHighPage Note

Page	Address	Size	Name	Description
2Fh	128	1	BIT:1-0 VDMSupport	0b: Group 1 (Page 20h, 24h, 28h, first ¼ of 2Ch, 2Dh)

TITLE 800G OSFP-RHS Active Loopback Module	DOC No. RFD-20260625300-002	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.25	CLASSIFICATION : Optical Transceiver

	129-130	1	FineIntervalLength	0xC350:interval is 5s
--	---------	---	--------------------	-----------------------

8.13 FFHighPage Note

Page	Address	Size	Name	Description
FFh	250	2	Power-cycle counter	Power-cycle counter. Default to 00_00h from factory.

9. Warnings

Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD).

A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

10. Modification History

Rev.	Comments	Date	Originator	Approval
01	Initial	2026.06.25	Hawk Rong	Mike Sun