
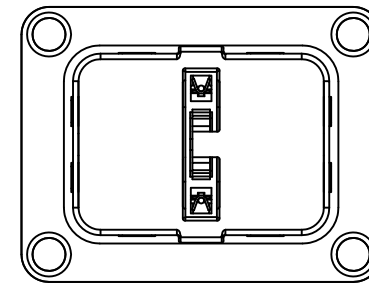
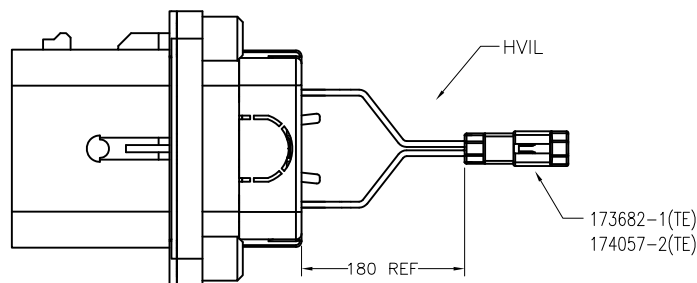
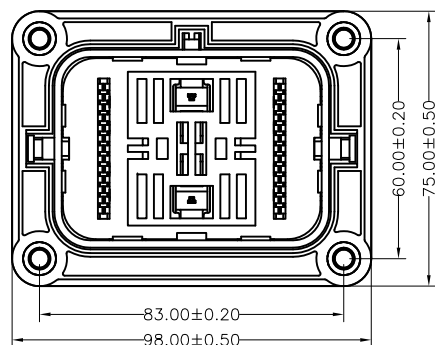
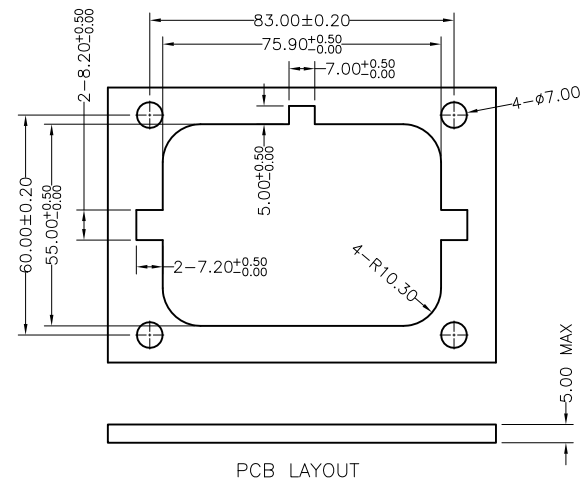
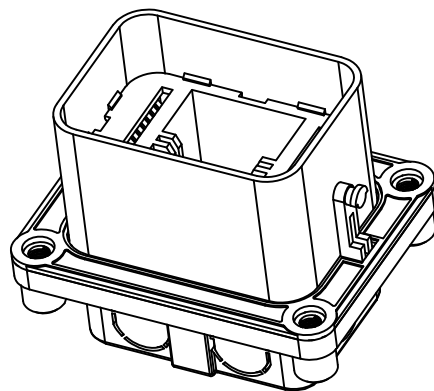



THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR  
DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)

# CUSTOMER DRAWING

REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
01		INITIAL DESIGN	Colin	Andrew	11/12/2020

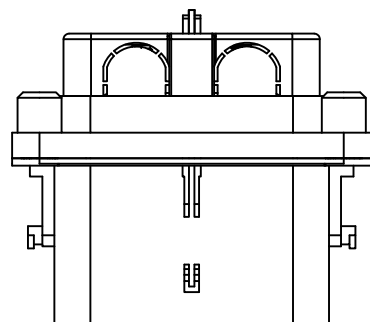

- NOTE :
- 儲存溫度 Storage temperature:  $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
  - 工作溫度 Operating temperature:  $-40 \sim +125^{\circ}\text{C}$
  - 額定電流 Current rating: 隨保險絲 (Fuse) 規格而變動;
  - 額定電壓 Operating voltage: Power: DC750V;
  - 防護等級 (連接狀態) Protection class: IP67 & IP6K9K;
  - 絕緣材料阻燃等級 Flame retardant grade of insulating materials: UL94V-0;
  - 使用壽命: Durability: 50cycle;
  - 帶高壓互鎖 Electrical interlock: (HVIL);
  - 安裝板厚度: 最大5mm
  - 安裝螺絲: 使用公製螺絲 M6X1 內六角, 長度20mm

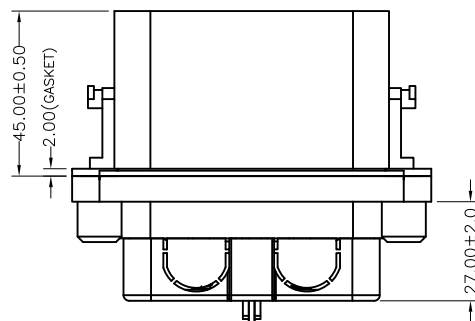

RoHS COMPLIANT	HALOGEN FREE	Unit : mm	PROJECTION		JPC connectivity		
		GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R.	11/12/2020	TITLE	Mini MSD 插座(後裝) (Customer drawing)	PD./FILE NO. & PRODUCT_NO C20C0011A
		0 = ±.50 0.0 = ±.25 0.00 = ±.15 0.000 = ±.05 0" = ±.2" 0.0" = ±.1"	Colin	CH.K			
			APV.D		SCALE	SIZE	REV. 01
					1:2	A4	SH.T NO. 1 OF 1
					DWG NO. PCN2C002RC78-0		