


THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)

CUSTOMER DRAWING


DRWC-003166

REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
01	---	INITIAL DESIGN	Chunxia	Richard	05/15/2022

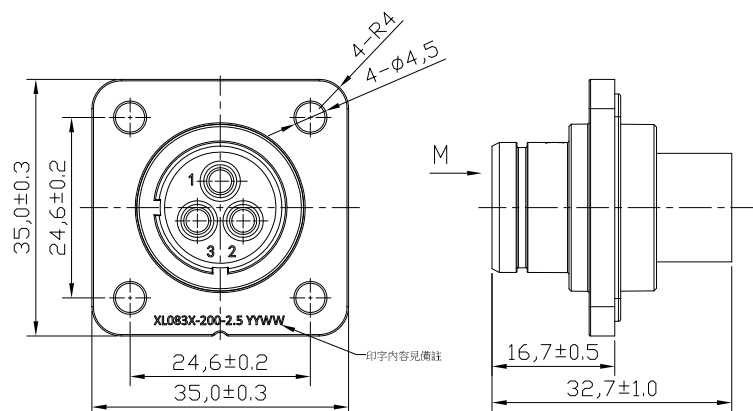

規格參數:

- 1.工作溫度Operating temperature: -40°C~+125°C.
- 2.額定電流Current rating: 2.5mm²: 23A; 4.0mm²: 32A.
- 3.額定電壓Operating voltage: 630VDC/400VAC.
- 4.耐電壓Dielectric withstanding voltage: 4000VDC.
- 5.防護等級Protection class: IP67(mated).
- 6.機械壽命Mating cycle: 100Min.
- 7.絕緣電阻Insulation resistance: 2000MΩ Min(25°C).
- 8.配對插頭Mating plug: PD8MX01X03W0-1/PD8MX01X03W0-2.

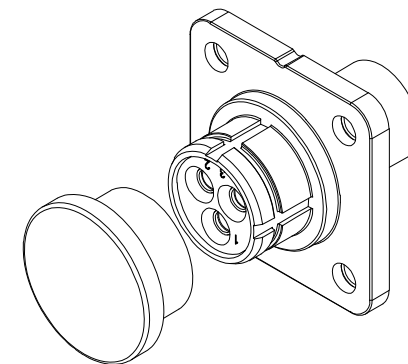

備註 (Note):

印字內容如下

XL0830-200-0 YYWW

連接器型號

"YY"為年份，取後面兩位
"WW"為周數

訂購信息 Ordering Informating


XL083X — 200 — XX

鍵位


"X"
"Y"
"Z"
"W"
"N"

線纜大小

"2.5"=2.5mm²
"4"=4.0mm²

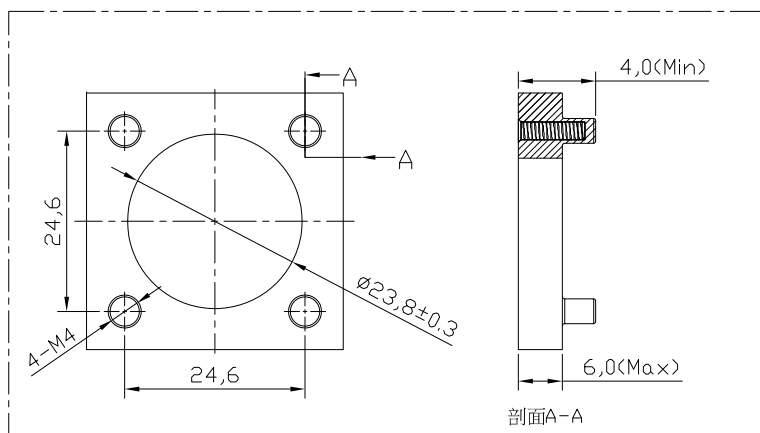

開孔面板尺寸信息

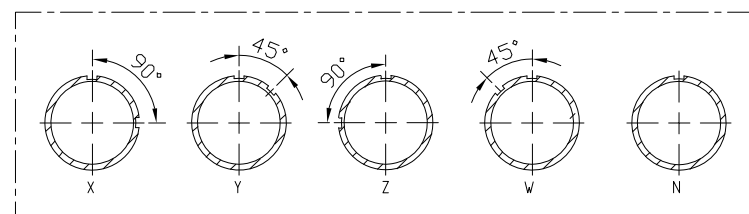

M方向鍵位示意圖

Standard Part List

Model NO.	JPC NO.	Polarization	Cable Size(mm ²)
XL083X-200-2.5	PD8FX01X03W0-1	X	2.5
XL083Y-200-2.5	PD8FY01X03W0-1	Y	2.5
XL083Z-200-2.5	PD8FZ01X03W0-1	Z	2.5
XL083W-200-2.5	PD8FW01X03W0-1	W	2.5
XL083N-200-2.5	PD8FN01X03W0-1	N	2.5
XL083X-200-4	PD8FX02X03W0-1	X	4
XL083Y-200-4	PD8FY02X03W0-1	Y	4
XL083Z-200-4	PD8FZ02X03W0-1	Z	4
XL083W-200-4	PD8FW02X03W0-1	W	4
XL083N-200-4	PD8FN02X03W0-1	N	4

RoHS COMPLIANT	HALOGEN FREE	Unit : mm	PROJECTION	JPC connectivity	
		GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 05/15/2022 Chunxia	TITLE	PD./FILE NO.
		0 = ±.50 0.0 = ±.25 0.00 = ±.15 0.000 = ±.05 0° = ± 2° 0.0° = ± 1°	CH.K 05/15/2022 Andrew	XL203插座	---
			APV.D 05/15/2022 Richard	SCALE 1:1	REV. 01
				SIZE A4	SHEET 1 OF 1
				PART NO. PD8FX01X03W0-1	