
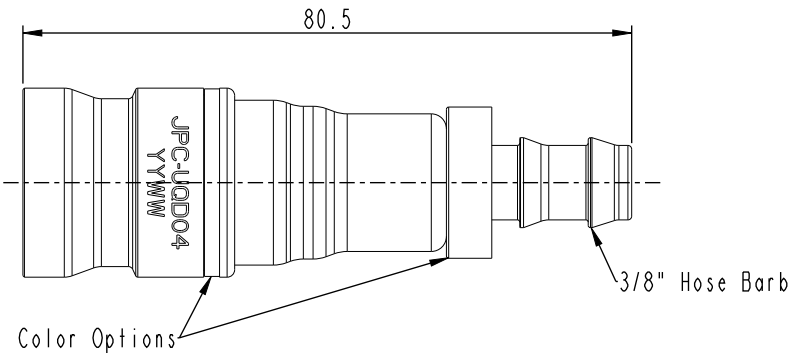



PART DRAWING DRWPA-XXXXXX		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
		01		INITIAL DESIGN	Bovan	Max	12/19/2024

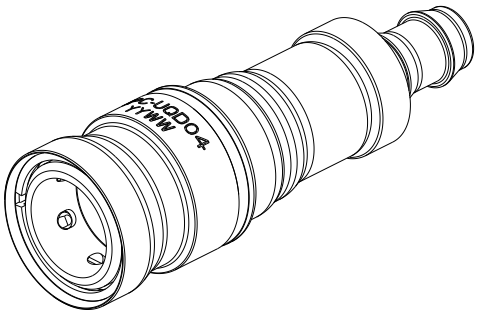

PART NO.: PUQD-04F-S002PS-XX

Color Options
BL
RD

- Notes:
- * Technical specification acc.to OCP UQD04
 - * Material:
 - Body: Stainless steel
 - Valve: Stainless steel
 - Sleeve: Stainless steel
 - O-ring: EPDM
 - Cap: Plastic
 - * Operating temperature range: 17°C~65°C
 - * Max. operating pressure 100 psi
 - * Max. burst pressure 300 psi
 - * Min. Cv 0.80
 - * RoHS Compliant.

RoHS COMPLIANT	HALOGEN FREE	Unit : mm	PROJECTION 	JPC connectivity			
		GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 12/19/2024 Bovan	TITLE UQD04 - FEMALE CONNECTOR		PD./FILE NO. XXXXXXXXX	
		0 = ±.20 0.0 = ±.10 0.00 = ±.05 0.000 = ±.03 0° = ± 1° 0.0° = ±.50°	CH.K 12/19/2024 Daniel				
			APV.D 12/19/2024 Max	SCALE 1:1	SIZE A4	PART NO. PUQD-04F-S002PS-XX	REV. 01 SHEET 1 OF 1