



1	2	3	4	5	6	7	8				
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)				CUSTOMER DRAWING DRWC-006985		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
						01		INITIAL DESIGN	Veera	Jason	04/12/2023
						02		KEY POINTS UPDATED	Veera	Jason	07/11/2024
						03		DRAWING UPDATED	Veera	Jason	12/12/2024

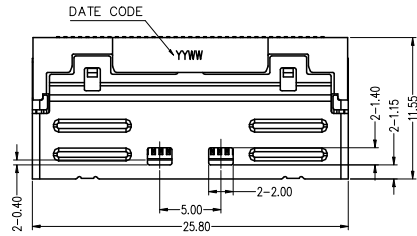

Notes:

1.Materials:

Housing: High temperature thermoplastic, UL94-V0, color: black
Terminal: Copper alloy
Shell: Stainless steel

2.Finish

Terminal:

Contact area: Gold plating 30u" min.
Solder area : Gold flash.

Under plating: Nickel plated 50u" min. over all.

Shell:

Nickel plated 50u" min. overall.

3.Package: Tape & Reel

4.Product spec refer to DSPC-002392

5.Date code location shown, date code





Format: YYWD

Y: Last one digits of the year

WW: One certain week of the year


D: One day of the week

6.P/N Matrix

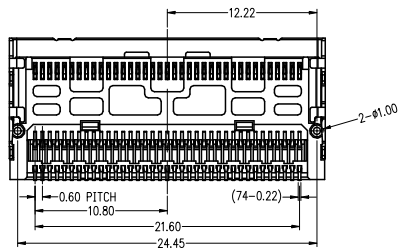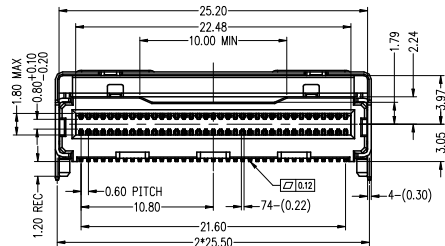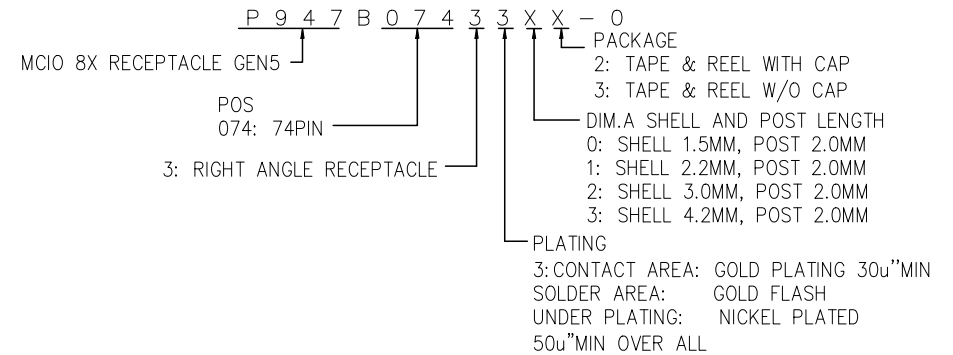

RoHS COMPLIANT	HALOGEN FREE	Unit: mm(inch)	PROJECTION	JPC connectivity	
		GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 04/12/2023		
		0 = ±1 (0.039)	Veera	TITLE	PD./FILE NO.
		0.0 = ±5 (0.02)	CH.K 04/12/2023	MCIO 8X GEN5 RIGHT ANGLE CONNECTOR	XXXXXXXXXX
0.00 = ±3 (0.012)	Albert	SCALE	SIZE	PART NO.	REV. 03
0.000 = ±15 (0.006)	APV.D 04/12/2023	1:1	A4	P947B0743313-0	SHEET 1 OF 3
0° = ± 2°	Jason				
0.0° = ± 1°					


1	2	3	4	5	6	7	8				
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)				CUSTOMER DRAWING DRWC-006985		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
						01		INITIAL DESIGN	Veera	Jason	04/12/2023
						02		KEY POINTS UPDATED	Veera	Jason	07/11/2024
						03		DRAWING UPDATED	Veera	Jason	12/12/2024

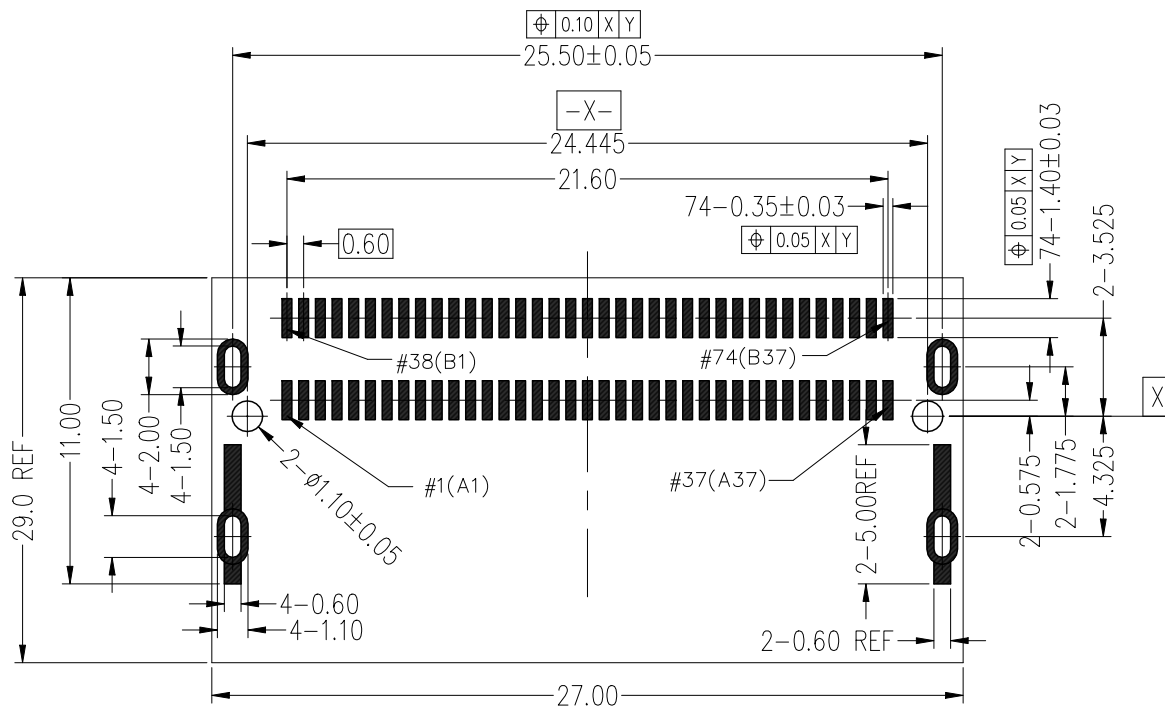

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE: ±0.05

RoHS COMPLIANT	HALOGEN FREE	Unit: mm(inch)	PROJECTION	JPC connectivity		
		GENERAL TOLERANCES: (UNLESS SPECIFIED)				
		0 = ±1 (0.039)	D.R. 04/12/2023	TITLE	PD./FILE NO.	
		0.0 = ±.5 (0.02)	Veera	MCIO 8X GEN5 RIGHT ANGLE CONNECTOR	XXXXXXXXXX	
0.00 = ±.3 (0.012)	CH.K 04/12/2023	Albert	X-XXXX			
0.000 = ±.15 (0.006)	APV.D 04/12/2023	Jason	SCALE	SIZE	PART NO.	REV.
0° = ± 2°			1:1	A4	P947B0743313-0	03
0.0° = ± 1°						SHEET 2 OF 3

1	2	3	4	5	6	7	8				
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)				CUSTOMER DRAWING DRWC-006985		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
						01		INITIAL DESIGN	Veera	Jason	04/12/2023
						02		KEY POINTS UPDATED	Veera	Jason	07/11/2024
						03		DRAWING UPDATED	Veera	Jason	12/12/2024

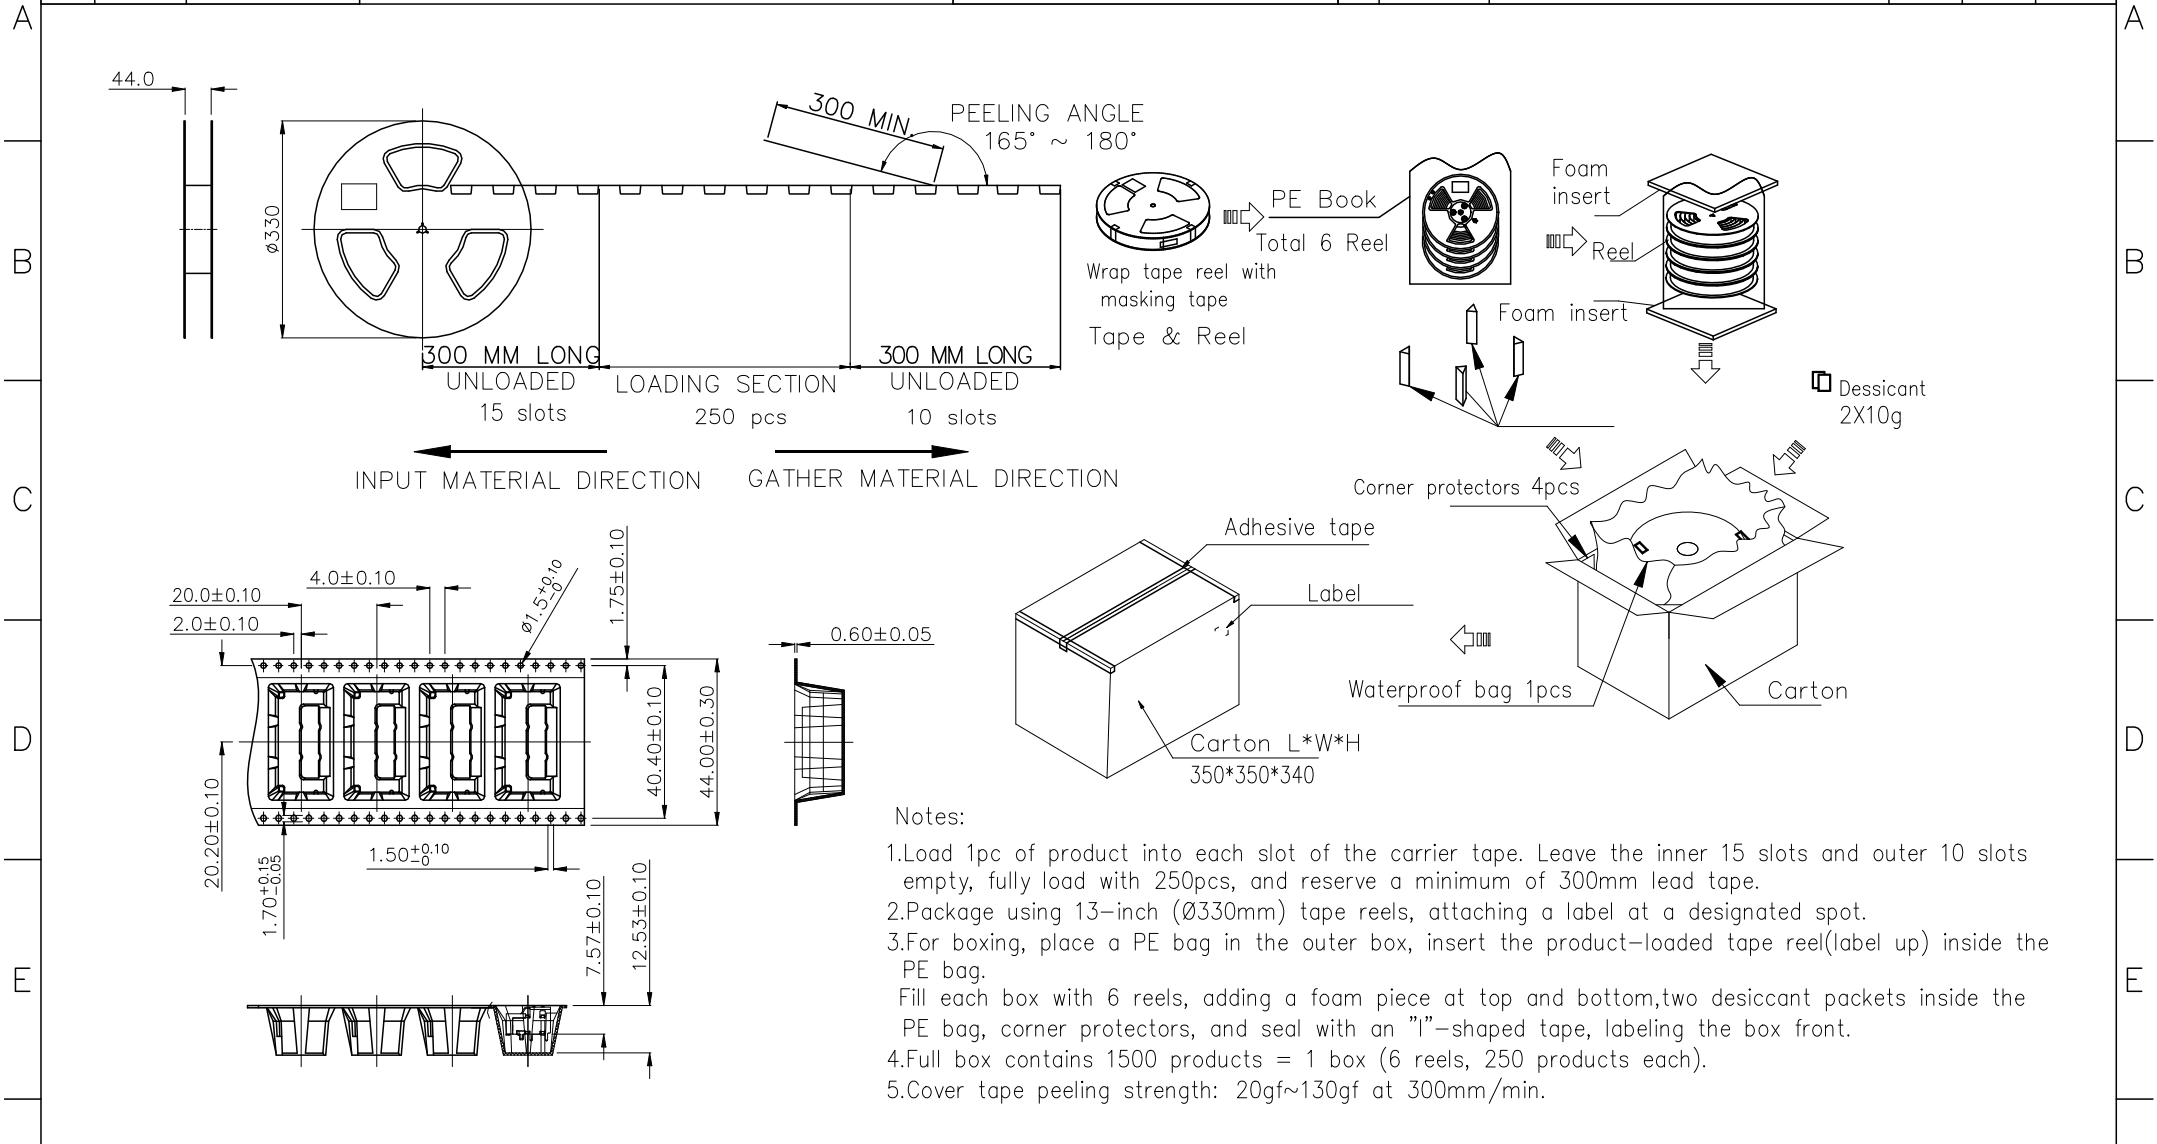

- Notes:
1. Load 1pc of product into each slot of the carrier tape. Leave the inner 15 slots and outer 10 slots empty, fully load with 250pcs, and reserve a minimum of 300mm lead tape.
 2. Package using 13-inch (Ø330mm) tape reels, attaching a label at a designated spot.
 3. For boxing, place a PE bag in the outer box, insert the product-loaded tape reel (label up) inside the PE bag. Fill each box with 6 reels, adding a foam piece at top and bottom, two desiccant packets inside the PE bag, corner protectors, and seal with an "I"-shaped tape, labeling the box front.
 4. Full box contains 1500 products = 1 box (6 reels, 250 products each).
 5. Cover tape peeling strength: 20gf~130gf at 300mm/min.

RoHS COMPLIANT	HALOGEN FREE	Unit: mm(inch)	PROJECTION		JPC connectivity		
		GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R.	04/12/2023			
		0 = ±1 (0.039)	Veera		MCIO 8X GEN5 RIGHT ANGLE CONNECTOR	XXXXXXXXXX	
		0.0 = ±5 (0.02)	Albert			X-XXXX	
0.00 = ±3 (0.012)	APV.D	04/12/2023	SCALE	SIZE	PART NO.	REV.	03
0.000 = ±15 (0.006)	Jason		1:1	A4	P947B0743313-0	SHEET	3 OF 3
0° = ± 2°							
0.0° = ± 1°							