



1	2	3	4	5	6	7	8				
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JPC connectivity Inc.(JPC)				CUSTOMER DRAWING DRWC-013549		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
						05		MODIFY NOTES	Sam	Ray	09/18/2025
						A1		APPROVED DESIGN	Sam	Ray	09/25/2025
						A2		APPROVED DESIGN:MODIFY DESIGN	Sam	Ray	11/17/2025

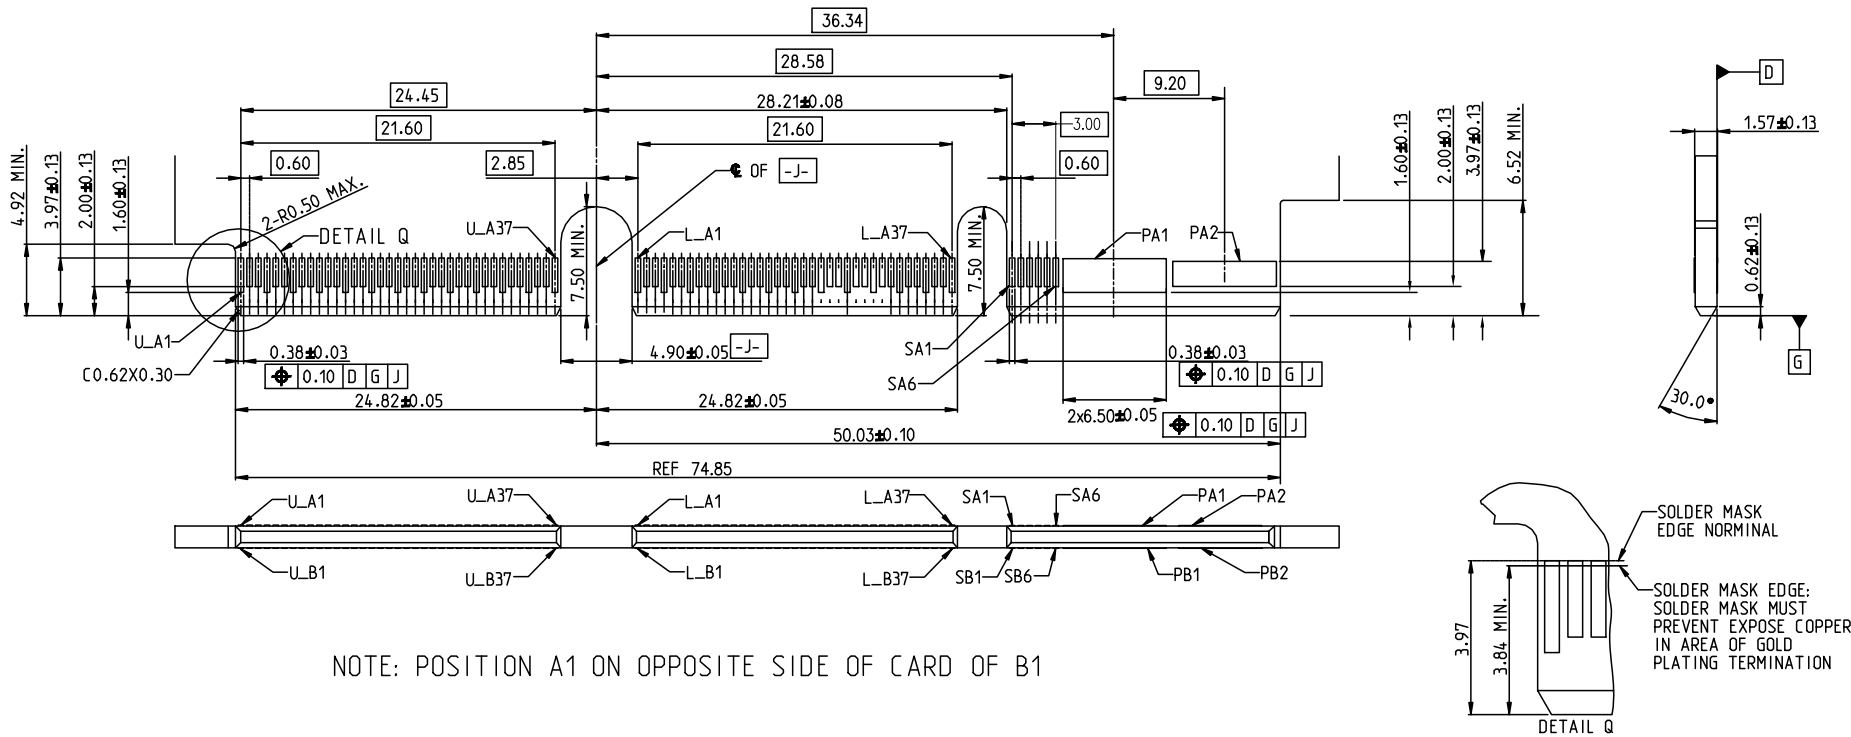


NOTE: POSITION A1 ON OPPOSITE SIDE OF CARD OF B1

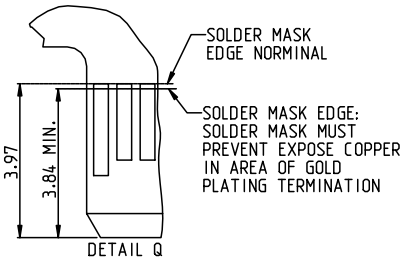

RoHS COMPLIANT	HALOGEN FREE	Unit:mm(inch)	PROJECTION	JPC connectivity TITLE: Multi-Trak Gen6 Vertical Combo 16X+55A Power Connector		PD./FILE NO. XXXXXXXXXX	
		GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 02/07/2025			REV. A2	
		0 ±1 (0.039)	Sam	CH.K 02/07/2025	SCALE NA	SIZE A4	PART NO. P947X17246X2-0
		0.0 ±1.5 (0.02)	Jason_Liu	APV,D 02/07/2025	RAY		SHEET 3 OF 4

1	2	3	4	5	6	7	8				
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JPC connectivity Inc.(JPC)				CUSTOMER DRAWING DRWC-013549		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
						05		MODIFY NOTES	Sam	Ray	09/18/2025
						A1		APPROVED DESIGN	Sam	Ray	09/25/2025
						A2		APPROVED DESIGN:MODIFY DESIGN	Sam	Ray	11/17/2025

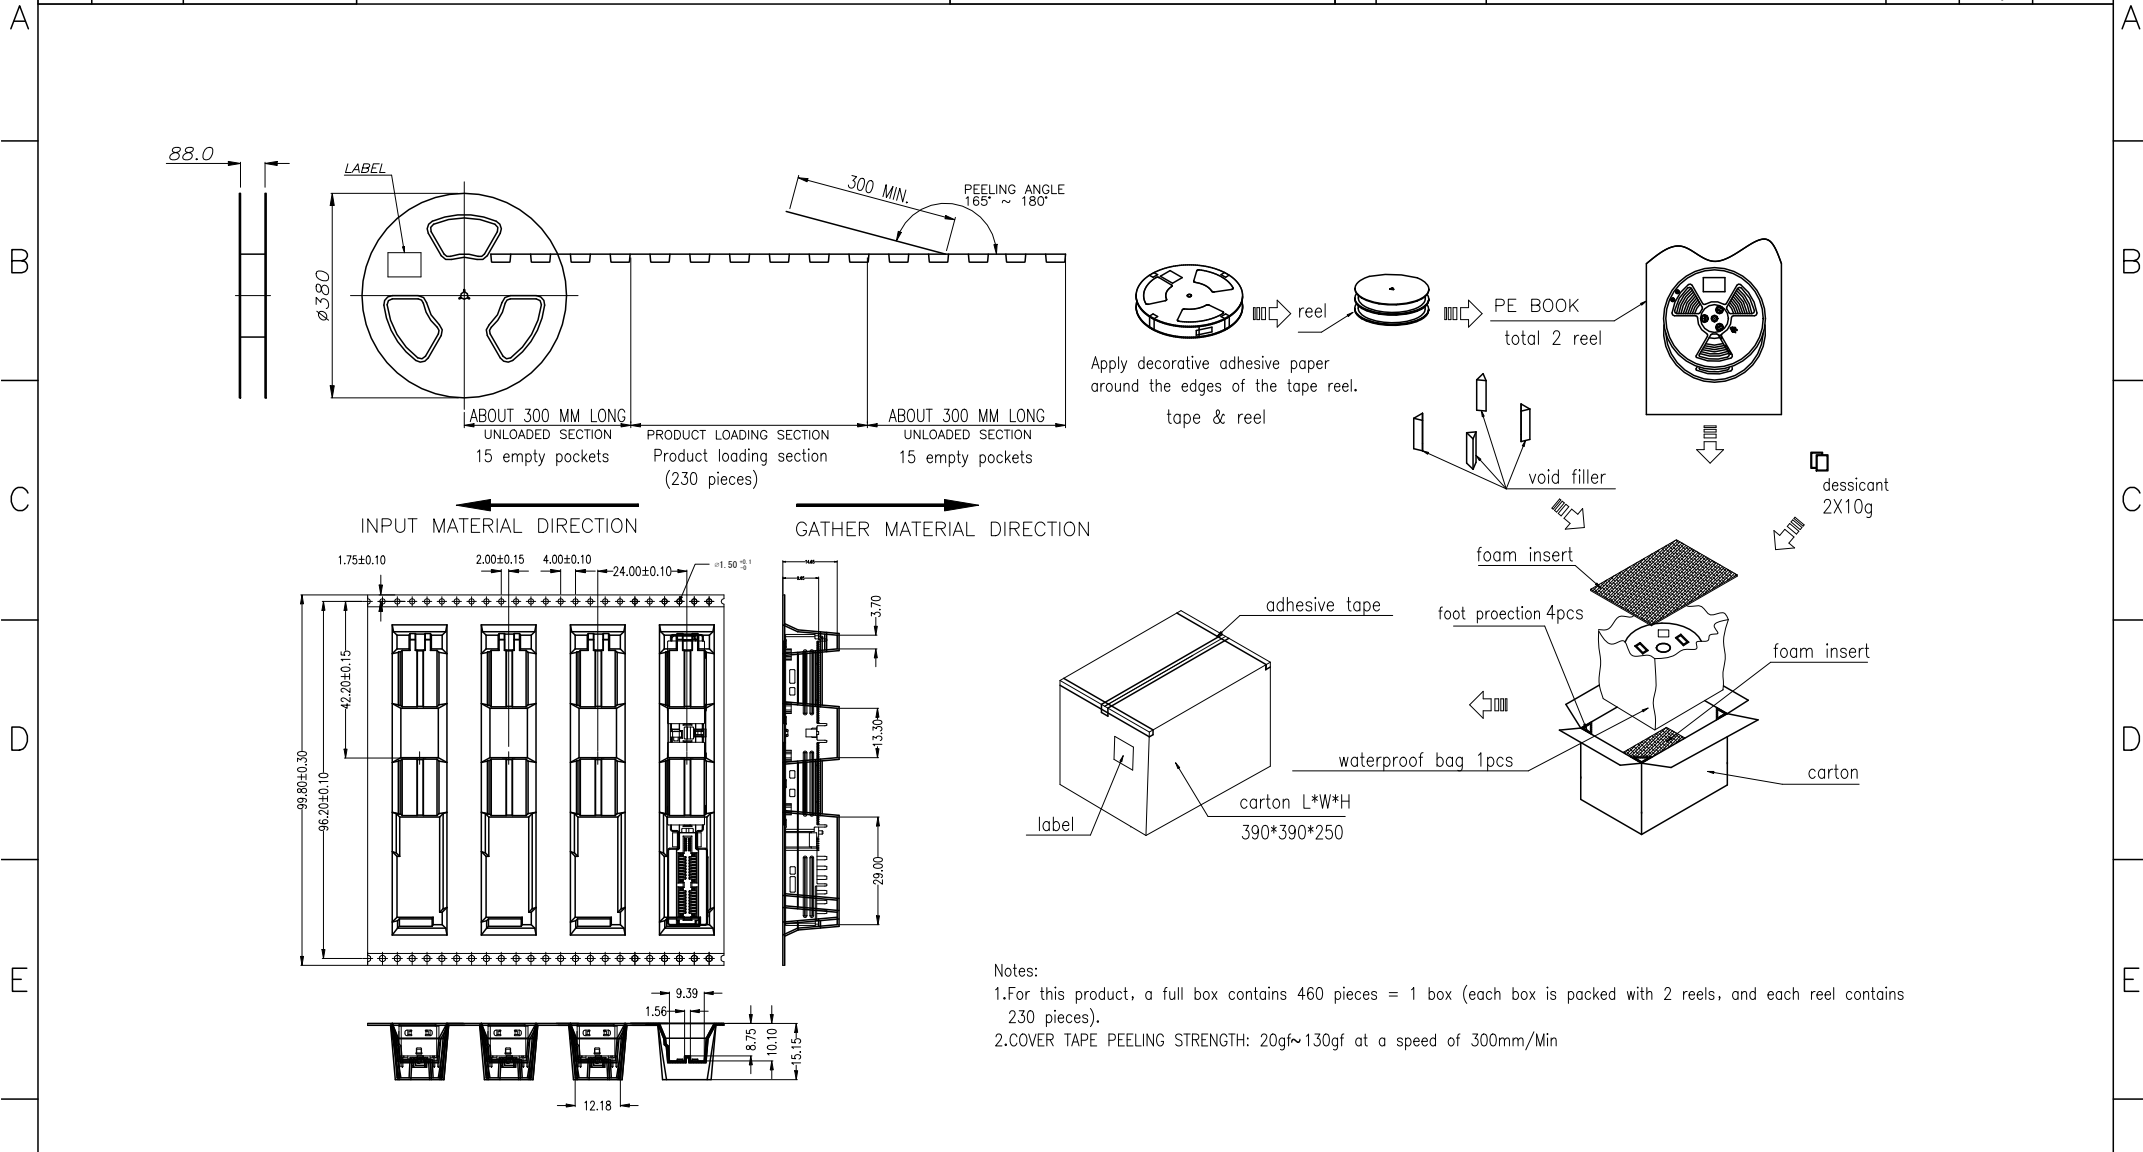

Notes:
 1.For this product, a full box contains 460 pieces = 1 box (each box is packed with 2 reels, and each reel contains 230 pieces).
 2.COVER TAPE PEELING STRENGTH: 20gf~130gf at a speed of 300mm/Min

RoHS COMPLIANT	HALOGEN FREE	Unit:mm(inch)	PROJECTION	JPC connectivity	
		GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 02/07/2025		
		0 =±1 (0.039)	Sam	TITLE	PD./FILE NO.
		0.0 =±5 (0.02)	CH.K 02/07/2025	Multi-Trak Gen6	XXXXXXXXXX
0.00 =±3 (0.012)	Jason_Liu	Vertical Combo 16X+55A Power Connector	X-XXXX		
0.000=±.15(0.006)	APV,D 02/07/2025	SCALE	SIZE	PART NO.	REV. A2
0° =± 2'	Ray	NA	A4	P947X17246X2-0	SHEET 4 OF 4
0.0° =± 1'					