


1 2 3 4 5 6 7 8

THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)

CUSTOMER DRAWING
DRWC-007789

REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
A1	ECN-*****	INITIAL DESIGN	Chunxia	Andrew	07/09/2023

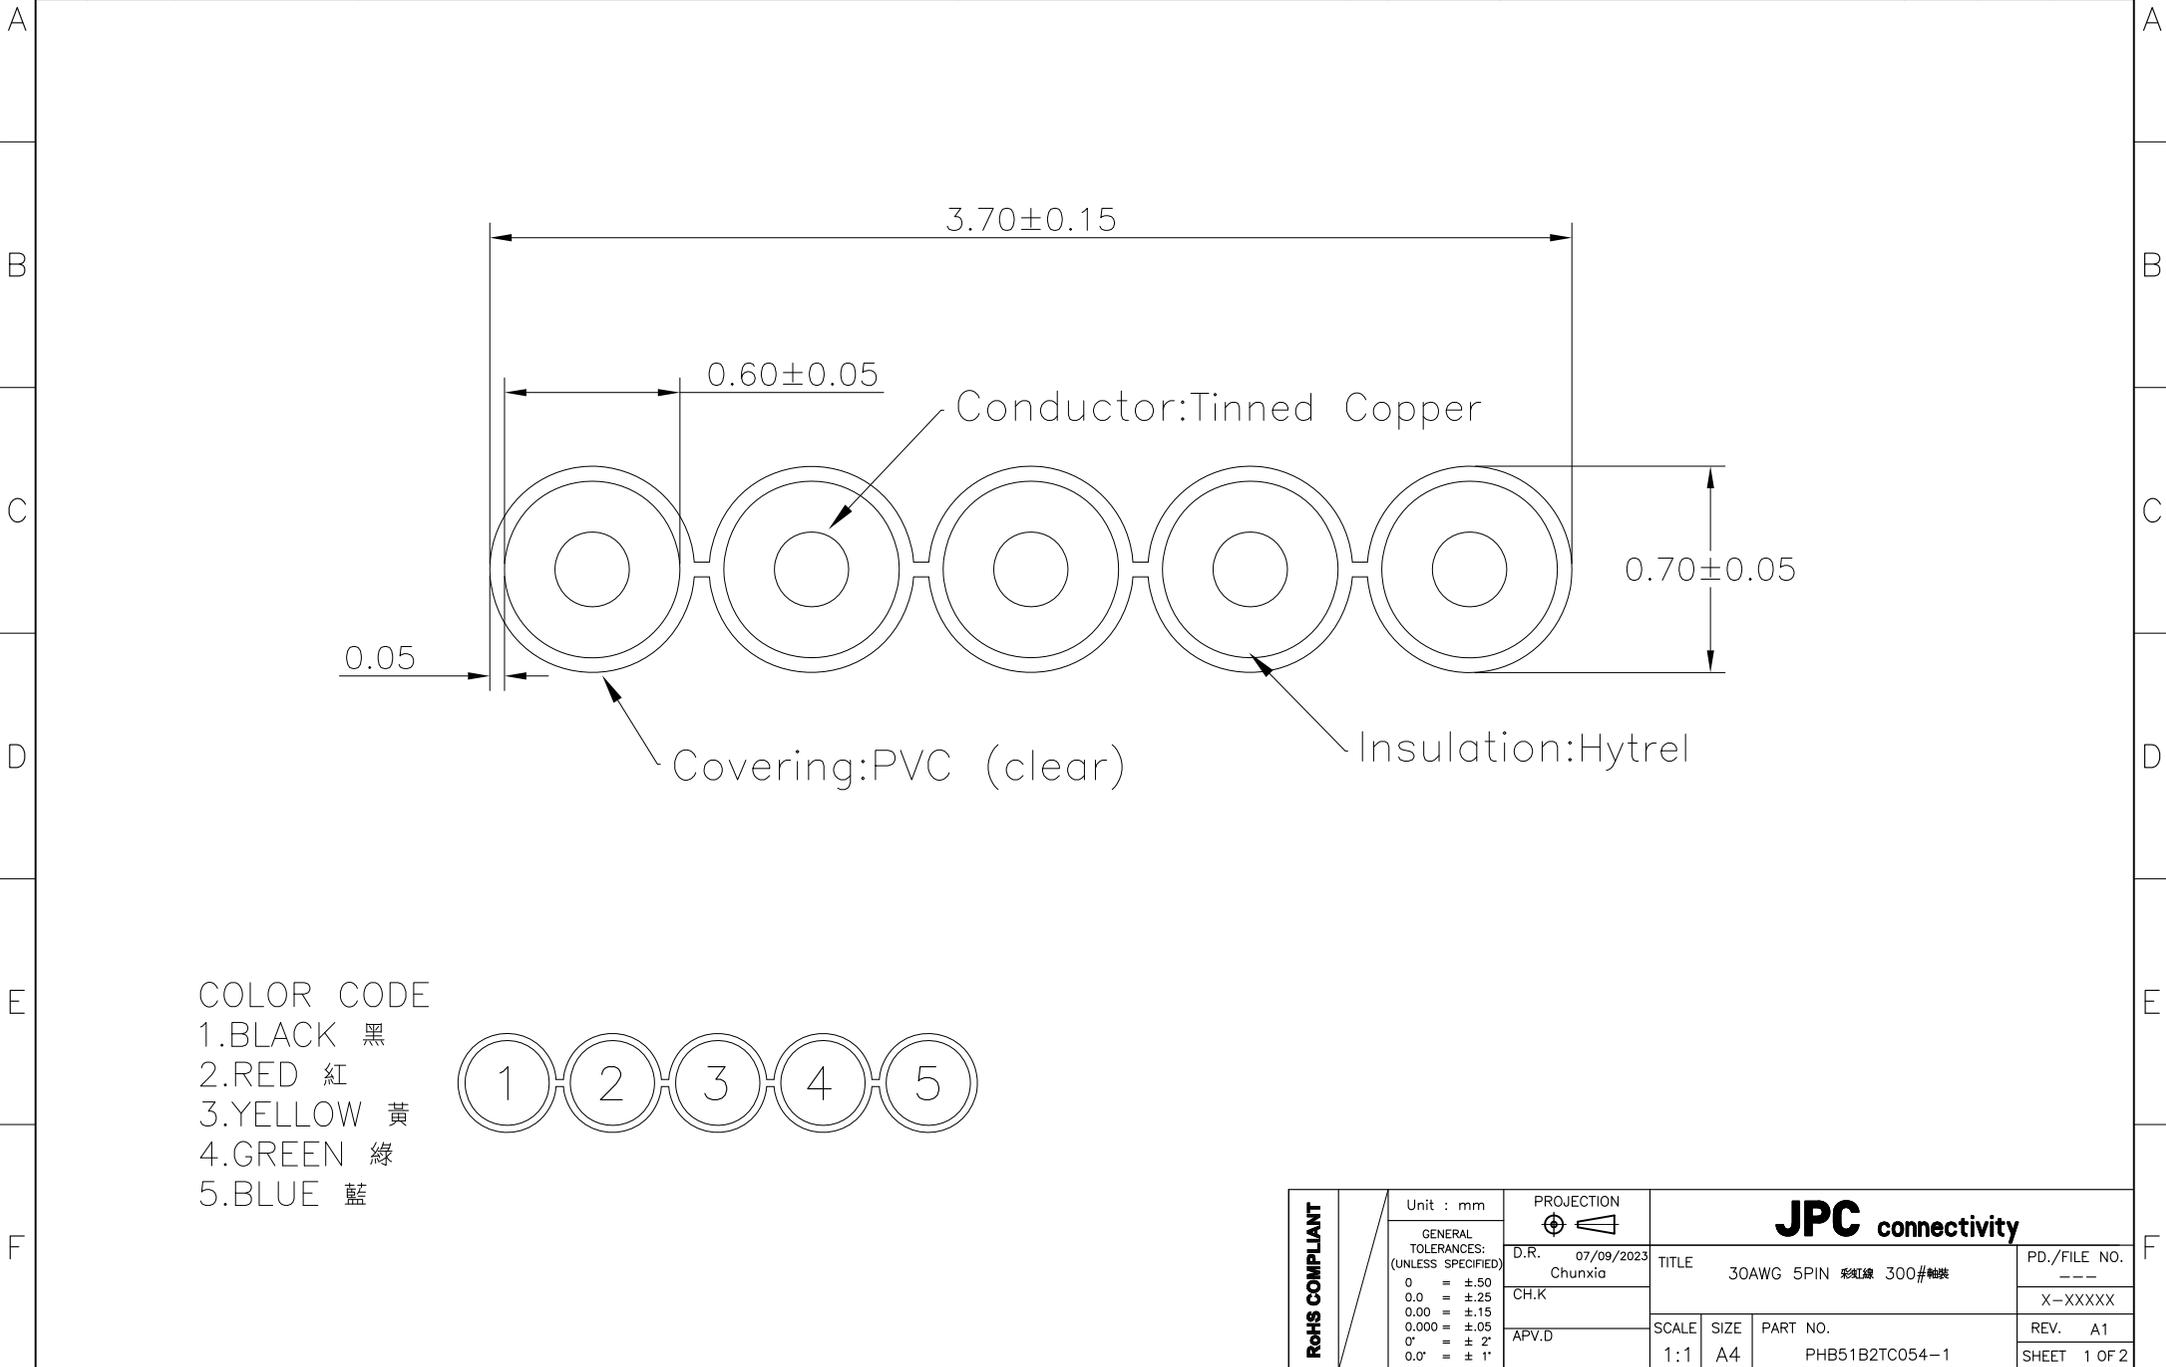

COLOR CODE
 1.BLACK 黑
 2.RED 紅
 3.YELLOW 黃
 4.GREEN 綠
 5.BLUE 藍



RoHS COMPLIANT	Unit : mm	PROJECTION 	JPC connectivity		
	GENERAL TOLERANCES: (UNLESS SPECIFIED) 0 = ±.50 0.0 = ±.25 0.00 = ±.15 0.000 = ±.05 0° = ± 2' 0.0° = ± 1'	D.R. 07/09/2023 Chunxia			SCALE 1:1
	CH.K	APV.D	TITLE 30AWG 5PIN 彩紅線 300#軸裝	PART NO. PHB51B2TC054-1	PD./FILE NO. X-XXXX
				REV. A1	SHEET 1 OF 2

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)

CUSTOMER DRAWING
DRWC-007789

REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
A1	ECN-*****	INITIAL DESIGN	Chunxia	Andrew	07/09/2023

A

A

B

B

C

C

D

D

E

E

F

F

一.SPECIFICATIONS:

UL GRADE:
UL Style.....-----

Rate Temperature.....105°C
Rate Voltage.....30V

二.PHYSICAL PROPERTY:

Stranded conductor
AWG size.. ..30 AWG
Material of insulation.. ..PVC

三. ELECTRONIC CHARACTERISTICS:

Dielectric strength: AC- 750V/1sec MIN
Insulation resistance: HY: DC- 500V 100MΩ/KM MIN.at 20°C
Conductor resistance: 30AWG- 368Ω/KM MAX. at 25°C
Operation temperature: -40°C~ +105 °C

RoHS COMPLIANT	Unit : mm	PROJECTION 	JPC connectivity	
	GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 07/09/2023 Chunxia		
	0 = ±.50 0.0 = ±.25 0.00 = ±.15 0.000 = ±.05 0' = ± 2' 0.0' = ± 1'	CH.K	30AWG 5PIN 彩虹線 300#軸裝	X-XXXXX
		APV.D	SCALE 1:1 SIZE A4 PART NO. PHB51B2TC054-1	REV. A1 SHEET 2 OF 2

1 2 3 4 5 6 7 8