


1			2		3		4		5		6		7		8				
			THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JPC connectivity Inc.(JPC)					CUSTOMER DRAWING DRWC-013549					REV.	ECN NO.	DESCRIPTION		MDF'D	APP'D	DATE
													O5		MODIFY NOTES		Sam	Ray	09/18/2025
													A1		APPROVED DESIGN		Sam	Ray	09/25/2025
													A2		APPROVED DESIGN:MODIFY DESIGN		Sam	Ray	11/17/2025

THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JPC connectivity Inc.(JPC)

CUSTOMER DRAWING
DRWC-013549

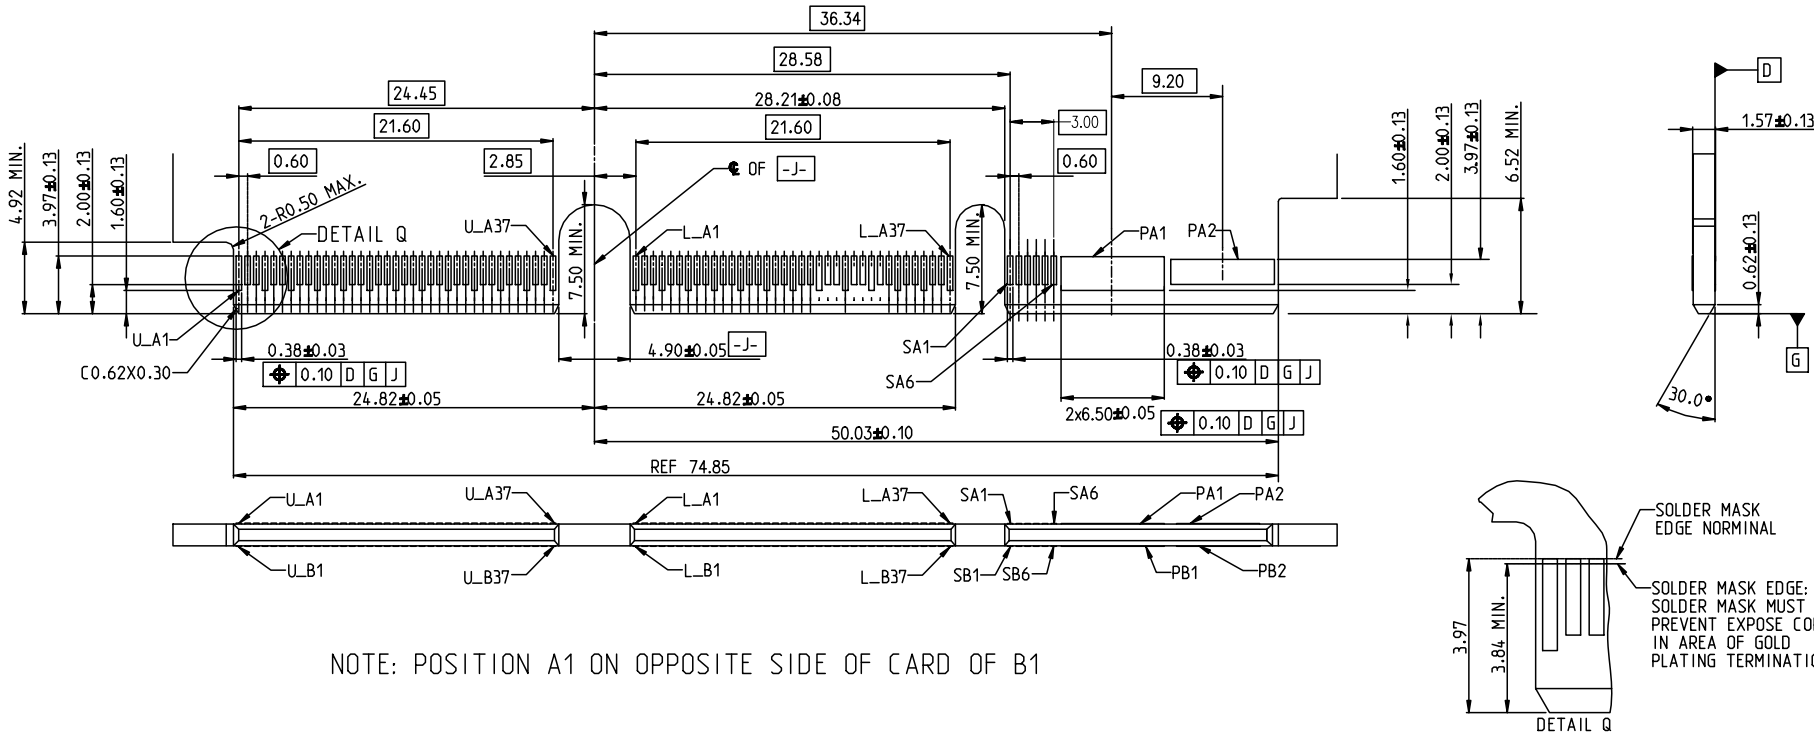



NOTE: POSITION A1 ON OPPOSITE SIDE OF CARD OF B1

RoHS COMPLIANT	HALOGEN FREE	Unit:mm(inch)	PROJECTION	JPC connectivity		
		GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 02/07/2025	TITLE	Multi-Trak Gen6 Vertical Combo 16X+55A Power Connector	PD./FILE NO. XXXXXXXXXX
		0 =±1 (0.039)	Sam			X-XXXX
		0.0 =±.5 (0.02)	CH.K 02/07/2025	SCALE	SIZE	REV. A2
		0.00 =±.3 (0.012)	Jason_Liu	NA	A4	SHEET 3 OF 4
		0.000=±.15(0.006)	APV.D 02/07/2025		PART NO.	
		0° =± 2°	Ray		P947X17246X2-0	
		0.0° =± 1°				

1			2		3		4		5		6		7		8				
			THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JPC connectivity Inc.(JPC)					CUSTOMER DRAWING DRWC-013549					REV.	ECN NO.	DESCRIPTION		MDF'D	APP'D	DATE
													05		MODIFY NOTES		Sam	Ray	09/18/2025
													A1		APPROVED DESIGN		Sam	Ray	09/25/2025
													A2		APPROVED DESIGN:MODIFY DESIGN		Sam	Ray	11/17/2025

THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JPC connectivity Inc.(JPC)

CUSTOMER DRAWING
DRWC-013549

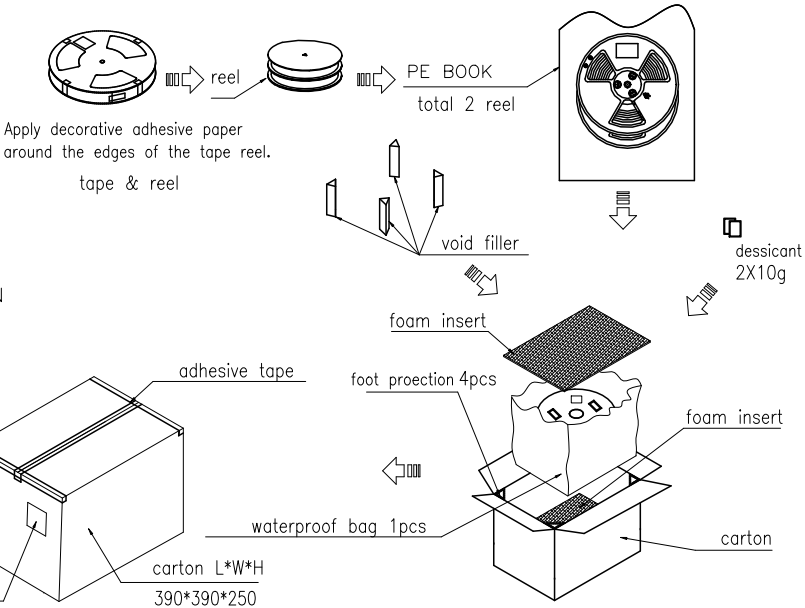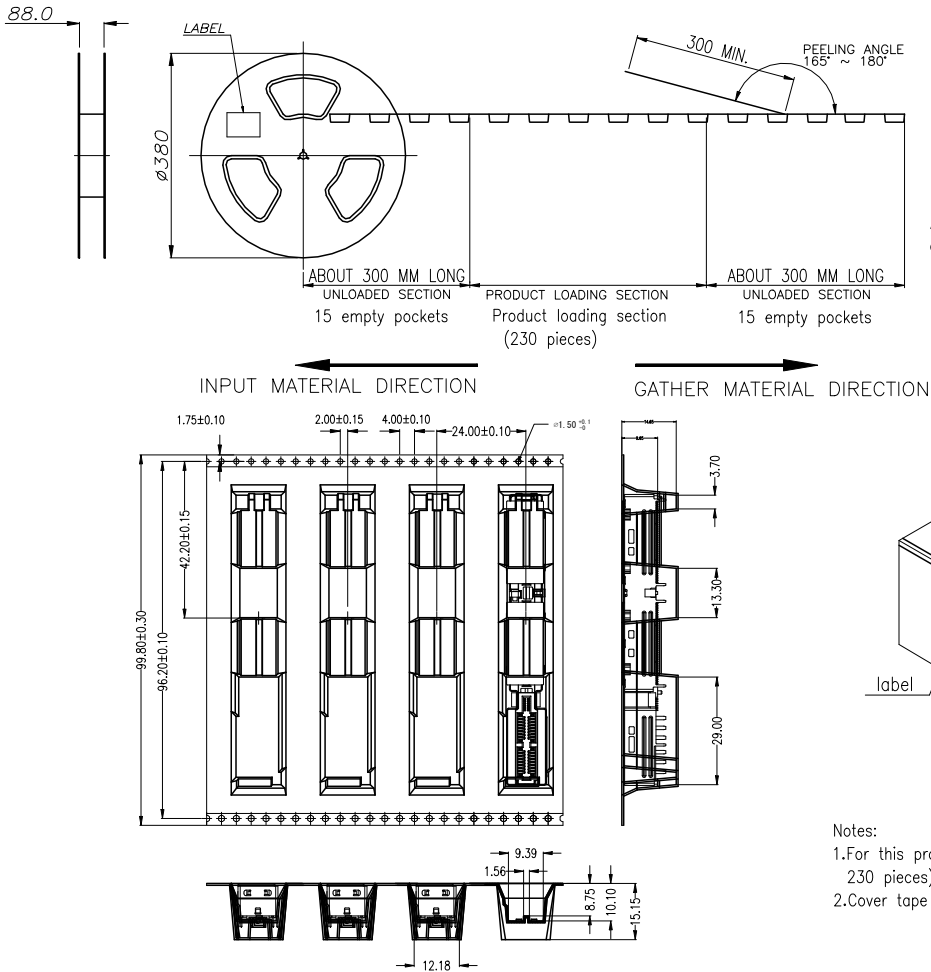

Notes:
1.For this product, a full box contains 460 pieces = 1 box (each box is packed with 2 reels, and each reel contains 230 pieces).
2.Cover tape peeling strength: 20gf~130gf at a speed of 300mm/Min

RoHS COMPLIANT	HALOGEN FREE	Unit:mm(inch)	PROJECTION	JPC connectivity			
		GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 02/07/2025	TITLE		PD./FILE NO.	
		0 ± 1 (0.039)	Sam	Multi-Trak Gen6		XXXXXXXXXX	
		0.0 ± 0.5 (0.02)	CH.K 02/07/2025	Vertical Combo 16X+55A Power Connector		X-XXXX	
RoHS COMPLIANT	HALOGEN FREE	0.00 ± 0.3 (0.012)	Jason_Liu	SCALE	SIZE	PART NO.	REV. A2
		0.000 ± 0.15 (0.006)	APV.D 02/07/2025				SHEET 4 OF 4
		0' $\pm 2'$	Ray				
		0.0' $\pm 1'$		NA	A4	P947X17246X2-0	