
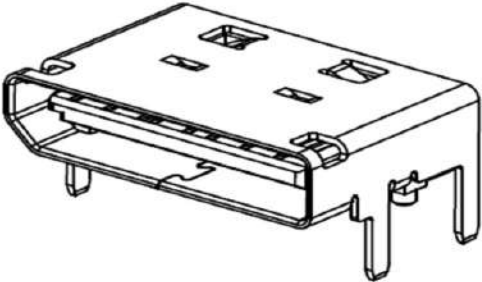


Oculink Connector	Pin	Data Rate	Impedance	Form Factor	Finished Surface
	42/4x	SAS 3.0(12GT/s) PCIe Gen4(16GT/s)	85/100ohm	Vertical	Au=15u"/30u"
	42/4x	SAS 3.0(12GT/s) PCIe Gen4(16GT/s)	85/100ohm	Right Angle	Au=15u"/30u"