




RoHS
Compliant





HSF

禁止使用1級環境管理物質

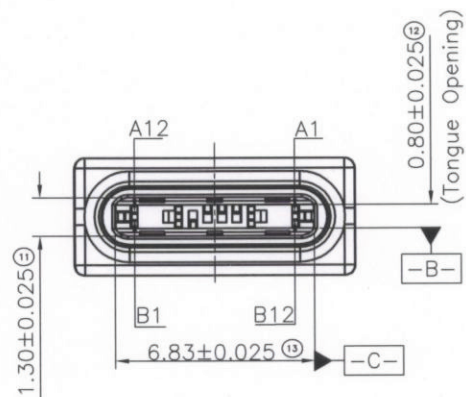


PIN Assignments

PIN	Signal Name
A1 B1 A12 B12	GND
A4 B4 A9 B9	V _{bus}
A5	CC
B5	V _{CONN}
A6	Dp1
A7	Dn1

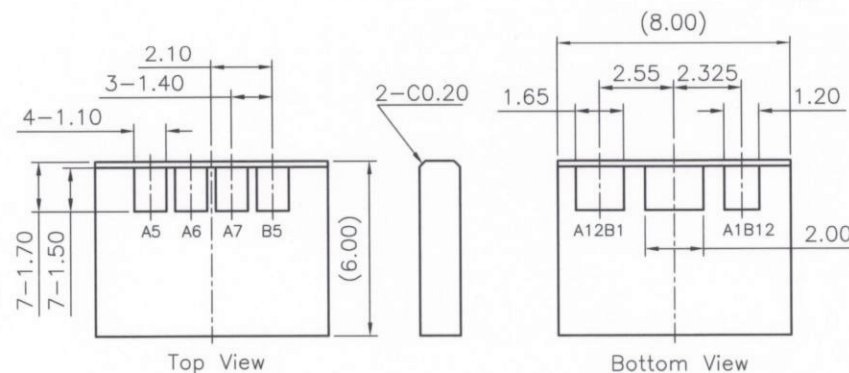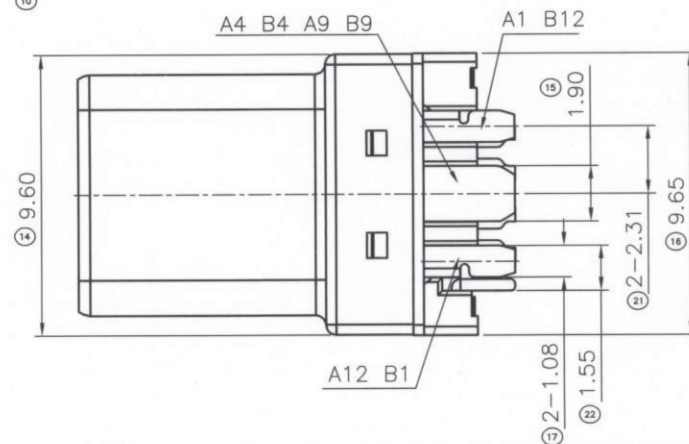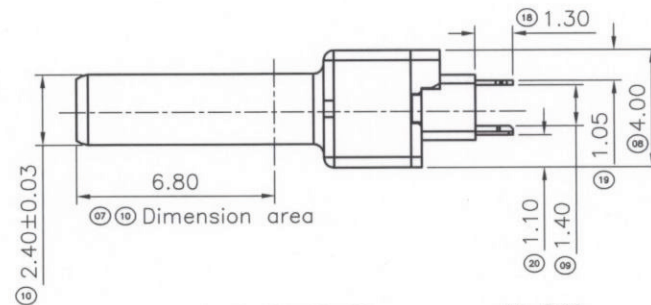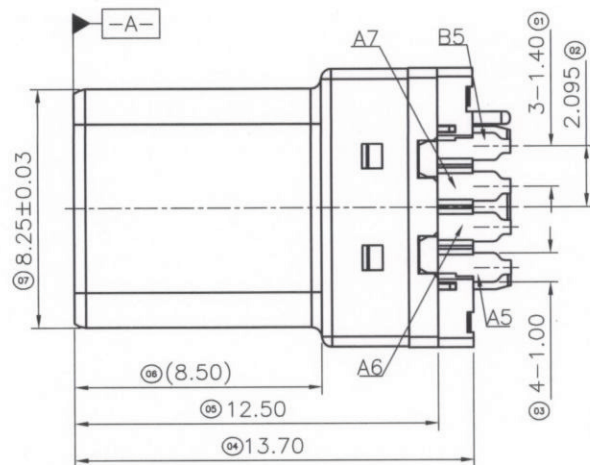

02 Recommended PCB Layout(T=1.40 $\pm$ 0.05)
Component Side(Tol:±0.03)

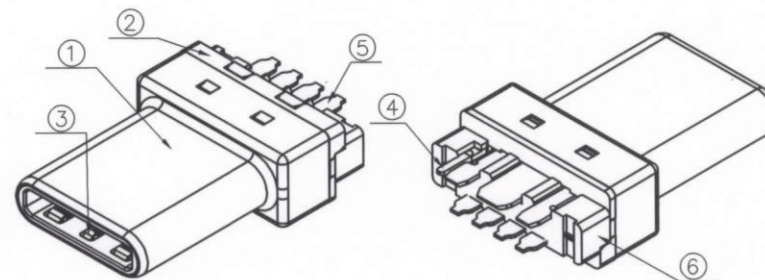

⑥	Insert Molding	High Temp. Thermoplastic	Black, UL94 V-0	
⑤	Terminal	Copper Alloy	Contact: Au & Solder: Sn	
④	Latch	Stainless Steel	T=0.30mm Overplating: Ni 40u" Min.	
③	EMI Spring	Stainless Steel	T=0.10mm Overplating: None.	
②	Housing	High Temp. Thermoplastic	Black, UL94 V-0	
①	Front Shell	Stainless Steel	T=0.15mm Overplating: Ni 40u" Min.	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
±0.50 .X ±0.25 .XX ±0.15 .XXX ±0.05 X.X ±1" X.XX ±0.5"	DRAWN	李華羽	C	TITLE: USB 2.0 Type C Plug Connector (Customer Drawing)
	DESIGN	李華羽	PART NO.	PCNBC001EC77-0
	CHECKED	李華羽	PRODUCT NO.	C15N0195A
	APPROVED	李華羽	DRAWING NO.	PCNBC001EC77-0
TOLERANCES			UNIT: mm	SCALE: 4:1 REV: 02 SHT: 1 of 1

JESS - LINK
PRODUCTS CO., LTD.

