


1			2		3		4		5		6		7		8		
			THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JPC connectivity Inc.(JPC)	CUSTOMER DRAWING						REV.	ECN NO.	DESCRIPTION		MDF'D	APP'D	DATE	
										01		INITIAL DESIGN		YANG	DENG	17/03/2025	
										02							
										03							

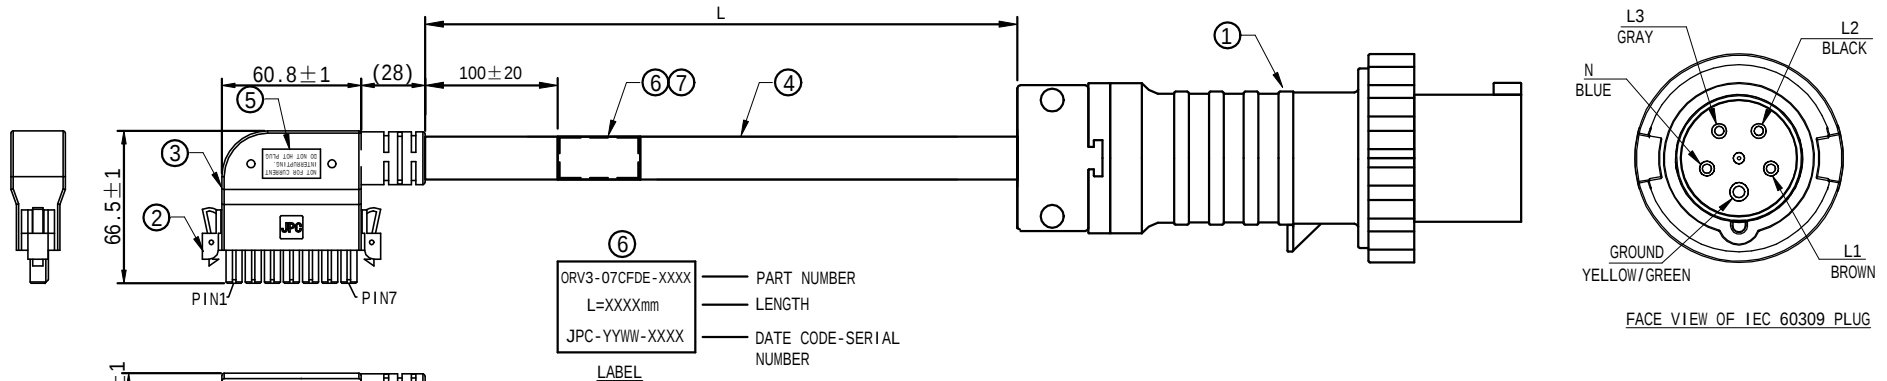

AC INPUT PAIR 1	PIN1	BROWN	L1
	PIN2	BLUE	N
AC INPUT PAIR 2	PIN3	BLACK	L2
PROTECTIVE EARTH	PIN4	YELLOW/GREEN	G
AC INPUT PAIR 2	PIN5		
	PIN6	GRAY	L3
AC INPUT PAIR 3	PIN7		

THE WIRING DIAGRAM

P/N	DESCRIPTION	L
ORV3-07CFDE-2100	ORV3 Series, AC Whip Overmolded Cable, 200-240/346-415 VAC, 32A, ORV3 AC Female Connector, Right Angle, H07RN-F 6 mm² Cable, IEC 60309 Plug, L=2100mm	2100 ⁺⁴⁰ ₋₀
ORV3-07CFDE-3000	ORV3 Series, AC Whip Overmolded Cable, 200-240/346-415 VAC, 32A, ORV3 AC Female Connector, Right Angle, H07RN-F 6 mm² Cable, IEC 60309 Plug, L=3000mm	3000 ⁺⁶⁰ ₋₀
ORV3-07CFDE-3200	ORV3 Series, AC Whip Overmolded Cable, 200-240/346-415 VAC, 32A, ORV3 AC Female Connector, Right Angle, H07RN-F 6 mm² Cable, IEC 60309 Plug, L=3200mm	3200 ⁺⁶⁰ ₋₀
ORV3-07CFDE-3800	ORV3 Series, AC Whip Overmolded Cable, 200-240/346-415 VAC, 32A, ORV3 AC Female Connector, Right Angle, H07RN-F 6 mm² Cable, IEC 60309 Plug, L=3800mm	3800 ⁺⁷⁰ ₋₀
ORV3-07CFDE-4300	ORV3 Series, AC Whip Overmolded Cable, 200-240/346-415 VAC, 32A, ORV3 AC Female Connector, Right Angle, H07RN-F 6 mm² Cable, IEC 60309 Plug, L=4300mm	4300 ⁺⁸⁰ ₋₀

8						
7	/	/	HEAT SHRINK TUBE TRANSPARENT	1	PCS	
6	/	/	LABEL WHITE	1	PCS	
5	/	/	LABEL YELLOW	1	PCS	
4	/	/	H07RN-F 5*6MM2 CABLE	A/R		
3	/	/	THERMOPLASTIC BLACK	A/R		
2	/	/	OCF ORV3 UNIVERSAL AC FEMALE CONNECTOR	1	PCS	
1	/	/	IEC 60309 PLUG	1	PCS	
ITEM	SUPL	SUPL PN	DESCRIPTION		Q'TY	

RoHS COMPLIANT	Unit:mm(inch)	PROJECTION		JPC connectivity Inc.	
	GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R.			
	0 =±1 (0.039)	CH.K		TITLE	PD./FILE NO.
	0.0 =±.5 (0.02)	APV.D		OCF ORV3 AC Whip Overmolded Cable	XXXXXXXXXX
	0.00 =±.3 (0.012)			SCALE	REV.
	0.000 =±.15(0.006)			SIZE	01
	0' =± 2'			PART NO.	
	0.0' =± 1'			ORV3-07CFDE-XXXX	
					SHEET 1 OF 1