
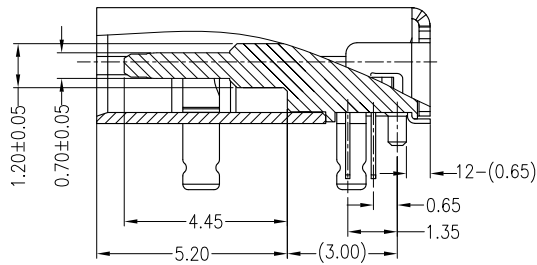


THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.






CUSTOMER DRAWING

REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
01		DRAWING RELEASE	TED	RICHARD	08/05/2015
A1	ECN-072495	CHANGE PICTURE FRAME	SONG	RICHARD	11/01/2018

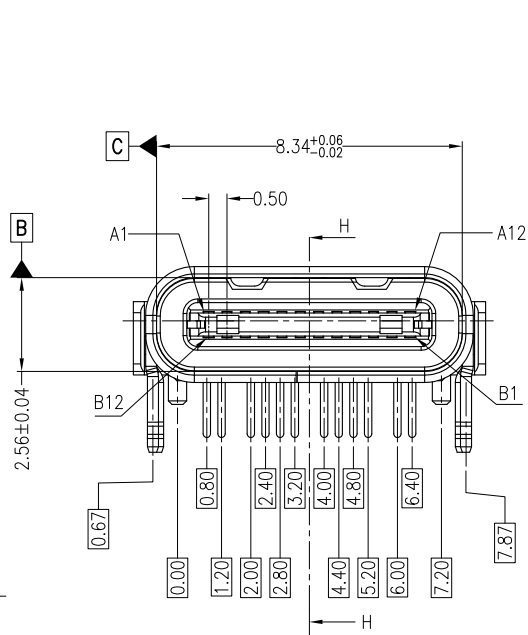

SECTION H-H

I1 PART NO.	LOGO	DIM A	DIM B	PCB T
PCNRC009EC76-0	NO LOGO	1.80mm	1.50mm	1.60mm
PCNRC010EC76-0	WITH LOGO	1.80mm	1.50mm	1.60mm
PCNRC011EC76-0	NO LOGO	1.40mm	1.30mm	1.20mm
PCNRC012EC76-0	WITH LOGO	1.40mm	1.30mm	1.20mm
PCNRC013EC76-0	NO LOGO	1.00mm	0.90mm	0.80mm
PCNRC014EC76-0	WITH LOGO	1.00mm	0.90mm	0.80mm

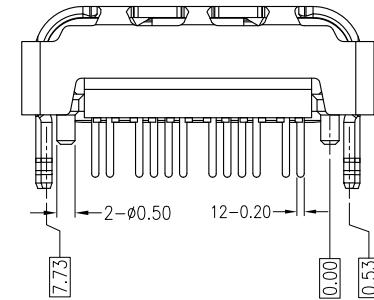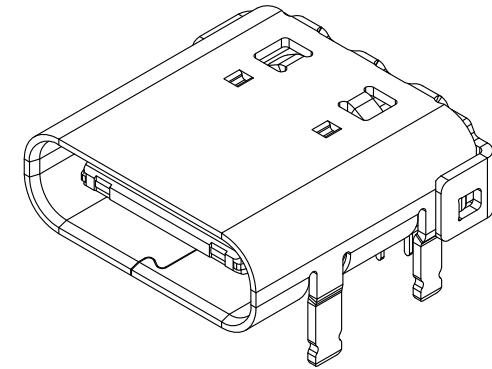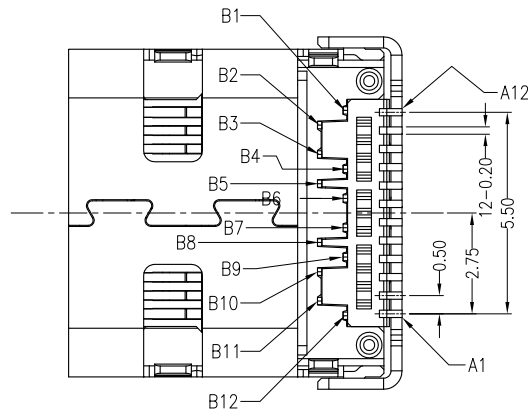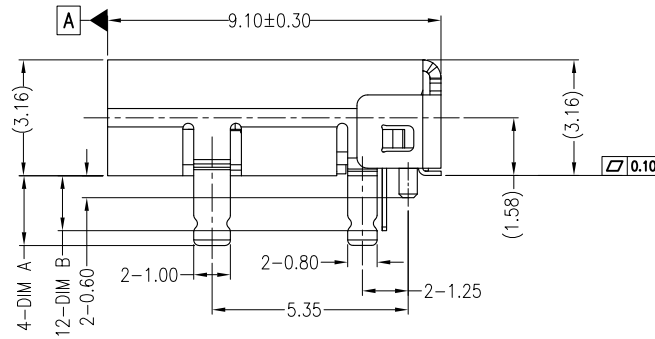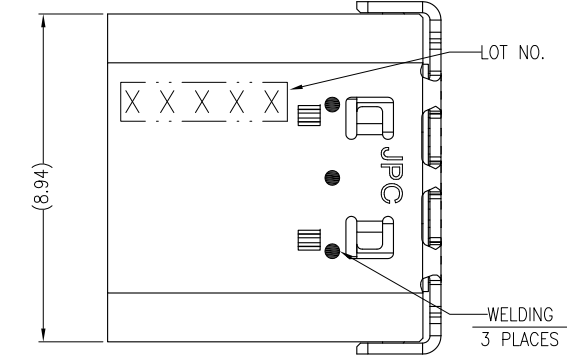


- NOTE:
- MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTICS,COLOR:BLACK
TERMINAL: COPPER ALLOY
SHELL: STAINLESS STEEL
 - PLATING:
TERMINAL: 30u" MIN GOLD ON MATING AREA
GOLD FLASH ON SOLDER AREA
50u" MIN NICKEL UNDERPLATE ALL OVER
SHELL: NICKEL OVER 40u" MIN.
 - PACKAGE: TAPE & REEL

RoHS COMPLIANT	HALOGEN FREE	Unit : mm	PROJECTION		JPC JESS-LINK PRODUCTS CO., LTD.				
		GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R.	SONG	TITLE			PRODUCT NO.	
			CH.K	ANDREW	USB 3.1 TYPE C RECEPTACLE HYBRID ON_BOARD			OR LAYOUT	
					TYPE CONNECTOR			C15N0197A	
			APV.D	RICHARD	SCALE	SIZE	DWG NO.	REV. A1	
					N/A	A4	PCNRC009EC76-0	SH,T NO. 1 OF 2	
		0 = ±.50							
		0.0 = ±.25							
		0.00 = ±.15							
		0.000 = ±.05							
0° = ± 1°									
0.0° = ±.50°									

CUSTOMER DRAWING

REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
01		DRAWING RELEASE	TED	RICHARD	08/05/2015
A1	ECN-072495	CHANGE PICTURE FRAME	SONG	RICHARD	11/01/2018

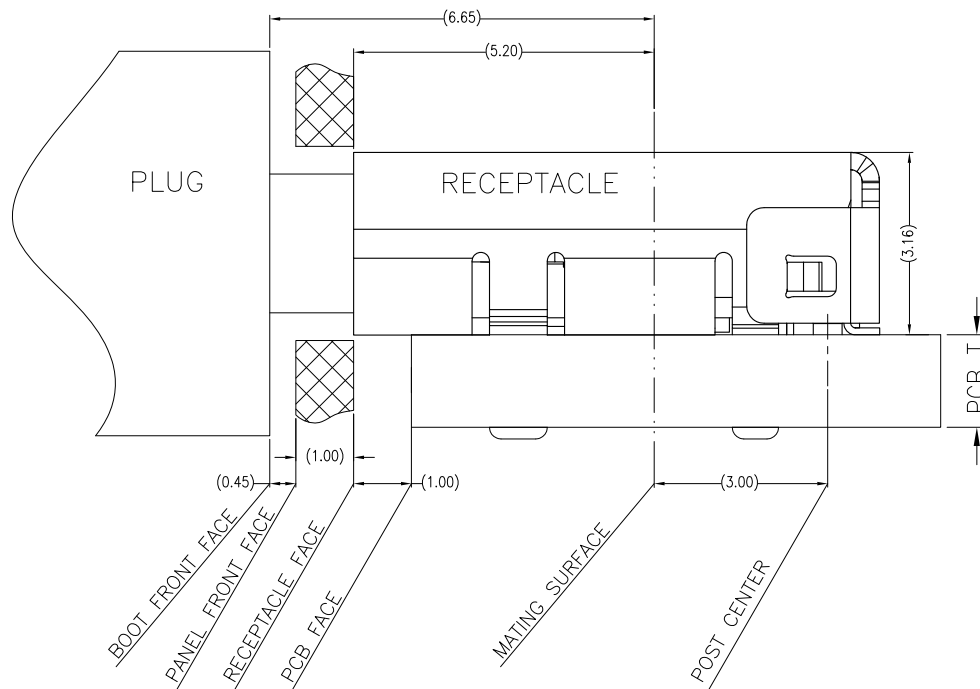

Technical drawing of a PCB layout showing dimensions and tolerances. The drawing includes various features such as holes, slots, and a central grid of holes. Key dimensions and tolerances are specified throughout the drawing, including:

- Top Section:**
 - Overall width: 0.30 ± 0.03 (12 PLACES)
 - Slot width: 0.85
 - Slot depth: 0.50 TYP
 - Distance from left edge to first slot: 0.70 ± 0.03 (12 PLACES)
 - Distance between slots: 0.66
 - Distance from left edge to center of first hole: 0.00
 - Distance from left edge to center of last hole: 0.65
- Central Grid:**
 - Grid of holes with diameters ranging from 0.65 ± 0.025 to 0.65 ± 0.05 .
 - Grid dimensions: 0.00 to 7.20 (horizontal) and 0.00 to 7.73 (vertical).
 - Grid spacing: 1.20 , 2.00 , 2.80 , 4.00 , 5.20 , 6.00 , 7.20 .
 - Grid labels: B12, B1, B12, B1.
- Right Section:**
 - Overall width: 0.95 ± 0.05
 - Distance from center of last hole to center of first hole: 0.65 ± 0.025
 - Distance from center of last hole to center of first hole: 1.25
 - Distance from center of last hole to center of first hole: 1.10 ± 0.05 (2 PLACES)
 - Distance from center of last hole to center of first hole: 1.60 ± 0.05
- Bottom Section:**
 - Overall width: 0.60 ± 0.05 (4 PLACES)
 - Distance from left edge to center of first hole: 1.10 ± 0.05
 - Distance from left edge to center of first hole: 0.67
 - Distance from left edge to center of first hole: 1.30 ± 0.05 (2 PLACES)
 - Distance from left edge to center of first hole: 1.80 ± 0.05
 - Distance from left edge to center of first hole: 0.67
- Other Features:**
 - PCB EDGE
 - 0.10 MIN ANNULAR RING TYP.
 - Distance from center of last hole to center of first hole: 5.35
 - Distance from center of last hole to center of first hole: 7.87
 - Distance from center of last hole to center of first hole: (7.20)

RECOMMENDED PCB LAYOUT

COMPONENT SIDE(Tol:±0.05)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1−	VBUS	CC1	D+	D−	SBU1	VBUS	RX2−	RX2+	GND
GND	RX1+	RX1−	VBUS	SBU2	D−	D+	CC2	VBUS	TX2−	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1


RoHS COMPLIANT	HALOGEN FREE	Unit : mm	PROJECTION 		JPC JESS-LINK PRODUCTS CO., LTD.			
		GENERAL TOLERANCES: (UNLESS SPECIFIED) 0 = ±.50 0.0 = ±.25 0.00 = ±.15 0.000 = ±.05 0" = ±.1" 0.0" = ±.50"	D.R.	SONG	TITLE USB 3.1 TYPE C RECEPTACLE HYBRID ON_BOARD TYPE CONNECTOR (CUSTOMER DRAWING)			PRODUCT NO. OR LAYOUT C15N0197A
			CH.K	ANDREW				
			APV.D	RICHARD	SCALE N/A	SIZE A4	DWG NO. PCNRC009EC76-0	REV. A1 SH,T NO.2 OF 2

CUSTOMER DRAWING



REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
01		NEW DRAWING RELEASE	TED	Richard	08/05/2015
A1	ECN-072495	CHANGE PICTURE FRAME	SONG	Richard	11/01/2018





序號 NO.	項 目 ITEM	
a	包裝方式 Method of packing	PCNRC0**EC76-C
b	包裝方式說明 Packing instruction	
c	內包裝單位 Unit of inner packing	箱 CARTON
d	內包裝含產品數量 Inner packing quantity	3500PCS
e	內包裝重量 (g) Inner packing weight	2.22KG
f	外包裝單位 Unit of outer packing	箱 CARTON
g	外包裝含內包裝數量 Quantity of inner packing	2
h	外包裝重量 (g) Weight of outer packing	0.718KG
i	總數量 (PCS) Total quantity	7000PCS
j	長Length (mm) × 寬Width (mm) × 高Height(mm)	365*365*390mm
k	數量 / 盤 1. QUANTITY/ REEL	700 PCS
l	淨重 / 箱 WEIGHT/ CARTON: N.W	見備註
m	毛重 / 箱 WEIGHT/ CARTON: G.W	見備註

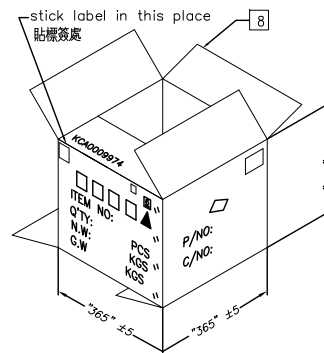

I1 PART NO.	LOGO	DIM A	DIM B	淨重/箱WEIGHT/CARTON:G.	毛重/箱WEIGHT/CARTON:G.
PCNRC009EC76-0	NO LOGO	1.80mm	1.50mm	4.45 KG	9.60±0.50 KG
PCNRC010EC76-0	WITH LOGO	1.80mm	1.50mm		
PCNRC011EC76-0	NO LOGO	1.40mm	1.30mm	4.0 KG	9.15±0.50 KG
PCNRC012EC76-0	WITH LOGO	1.40mm	1.30mm		
PCNRC013EC76-0	NO LOGO	1.00mm	0.90mm	3.55 KG	8.70±0.50 KG
PCNRC014EC76-0	WITH LOGO	1.00mm	0.90mm		

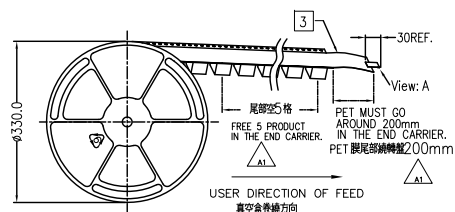

10 REEL/OUTER CARTON
2 INNER CARTON/OUTER CARTON



NOTES:

1. QUANTITY/REEL: 700 PCS/REEL
數量/盤 : 700PCS/盤
QUANTITY/INNER CARTON: 700 X 5 = 3500 PCS
數量/內箱 : 700 X 5 = 3500 PCS
QUANTITY/OUTER CARTON: 3500 X 2 = 7000 PCS
數量/外箱 : 3500 X 2 = 7000 PCS
2. FREE 20 PRODUCT IN THE FRONT CARRIER AND FREE 5 PRODUCT IN THE END CARRIER./包裝前部20個, 尾部5個
3. 反鎖鎖喉用鋼索鎖連

8	OUTER CARTON	K=A	KCA0009974	1	RoHS COMPLIANT	HALOGEN FREE	Unit : mm GENERAL TOLERANCES: (UNLESS SPECIFIED) 0 = ±.30 0.0 = ±.20 0.00 = ±.10 0.000 = ±.05 0 = ±.1 0.0 = ±.50	PROJECTION 	JPC JESS-LINK PRODUCTS CO., LTD.					
7	A TYPE PAD	B=C	KCA0009597	8					D.R.	SONG	TITLE		PRODUCT NO.	
6	INNER CARTON	K=A	KCA0009532	2					CH.K	ANDREW	USB 3.1 TYPE C RECEPTACLE HYBRID ON_BOARD		OR LAYOUT	
5	PE BAG		KBA0007717	2							TYPE CONNECTOR (PACKING DRAWING)		C15N0197A	
4	TAPE & REEL	PS T=2.0,BLUE	KPP0005846	10					APV.D	RICHARD	SCALE	SIZE	DWG NO.	REV. A1
3	COVER TAPE	PET	KPP0004658	/							X:X	A4	SOP-PK-PCNRC009EC76-0	SH,T NO.1 OF 1
2	CARRIER TAPE	PS T=0.40,BLACK	KPP0005980	/										
1	CONNECTOR		PCNRC0**EC76-0	7000										
ITEM	PART	DESCRIPTION	PART NUMBER	Q'TY										